

A Moving Boundary Problem Arising from the Diffusion of Oxygen in Absorbing Tissue

JOHN CRANK AND RADHEY S. GUPTA

Department of Mathematics, Brunel University, Uxbridge

[Received 17 September 1971 and in revised form 2 November 1971]

Approximate analytical and numerical solutions of a partial differential equation are obtained which describe the diffusion of oxygen in an absorbing medium. Essential mathematical difficulties are associated with the presence of a moving boundary which marks the furthest penetration of oxygen into the medium and also with the need to allow for an initial distribution of oxygen through the medium.

1. Introduction

THE CLASSICAL moving-boundary problem in heat flow which has been most thoroughly studied is one in which a change of state occurs on the moving interface. The velocity of the boundary is determined by the physical requirement that the latent heat required for the change of phase must be supplied or removed by conduction. Such problems are often referred to as “Stefan problems” after J. Stefan who published a paper on the subject towards the end of the nineteenth century. There is an extensive literature dating from that time. An excellent survey is given by Muehlbauer & Sunderland (1965).

The present paper concerns a problem arising from the diffusion of oxygen in a medium which simultaneously consumes the oxygen. A moving boundary is an essential feature of this problem also, but the conditions which determine its movement are different. Not only is the concentration of oxygen always zero at the boundary but, in addition, no oxygen diffuses across the boundary at any time. There is thus no relationship which contains the velocity of the moving boundary explicitly. A combination of analytical and numerical methods are applied to this problem and the results are finally expressed in the form of an approximate polynomial expression.

The work is of immediate interest in medical research concerning the uptake of oxygen by tissue and the problem was suggested to us by Dr N. T. S. Evans at the Medical Research Council’s Experimental Radiopathology Unit, Hammersmith Hospital.

2. Statement of the Problem

First, oxygen is allowed to diffuse into a medium, and some of the oxygen is absorbed by the medium, thereby being removed from the diffusion process. The concentration of oxygen at the surface of the medium is maintained constant. This first phase of the problem continues until a steady-state is reached in which the oxygen does not penetrate any further into the medium. The supply of oxygen is then cut off

and the surface is sealed so that no further oxygen passes in or out. The medium continues to absorb the available oxygen already in it and as a consequence the boundary marking the furthest depth of penetration in the steady-state, recedes towards the sealed surface. The major problem is that of tracing the movement of the boundary during this phase and of determining the distribution of oxygen through the medium as a function of time. A secondary problem in the application of numerical techniques is associated with the discontinuity in the derivative boundary condition which results from the abrupt sealing of the surface.

The diffusion-with-absorption process is represented by the partial differential equation

$$\frac{\partial C}{\partial T} = D \frac{\partial^2 C}{\partial X^2} - m, \quad (2.1)$$

where $C(X, T)$ denotes the concentration of the oxygen free to diffuse at a distance X from the outer surface of the medium at time T , D is a constant diffusion coefficient and m , the rate of consumption of oxygen per unit volume of the medium, is also assumed constant.

The problem has two parts:—

(a) *Steady-state solution*

During the initial phase, when the oxygen is entering through the surface, the following boundary condition is satisfied,

$$C = C_0, \quad X = 0, \quad T \geq 0, \quad (2.2)$$

where C_0 is a constant.

A steady-state is achieved in which the concentration at every point in the medium becomes independent of time, i.e. $\partial C/\partial T = 0$ everywhere, when the gradient of concentration becomes zero at the point, X_0 , in the medium where the concentration itself is zero. No oxygen can then diffuse beyond this point and we have the conditions,

$$C = 0, \quad X \geq X_0, \quad (2.3)$$

$$\frac{\partial C}{\partial X} = 0, \quad X \geq X_0, \quad (2.4)$$

for $T \geq 0$.

The steady-state is defined by a solution of

$$D \frac{\partial^2 C}{\partial X^2} - m = 0 \quad (2.5)$$

which satisfies the boundary conditions (2.2), (2.3) and (2.4). This solution is readily seen to be

$$C = \frac{m}{2D}(X - X_0)^2, \quad (2.6)$$

where

$$X_0 = \sqrt{\left(\frac{2DC_0}{m}\right)}. \quad (2.7)$$

(b) *Moving Boundary Problem*

After the surface $X = 0$ has been sealed, oxygen which is already in the medium, in the range $0 \leq X \leq X_0$, continues to be consumed. Consequently, the point of zero-concentration which was initially given by (2.7) recedes towards $X = 0$. Let the position of this point at any time, T , be represented by $X_0(T)$. The second phase of the problem can be expressed by the equation,

$$\frac{\partial C}{\partial T} = D \frac{\partial^2 C}{\partial X^2} - m, \quad 0 \leq X \leq X_0(T), \tag{2.8}$$

with the following conditions,

$$\frac{\partial C}{\partial X} = 0, \quad X = 0, \quad T \geq 0, \tag{2.9}$$

$$C = \frac{\partial C}{\partial X} = 0, \quad X = X_0(T), \quad T \geq 0, \tag{2.10}$$

$$C = \frac{m}{2D}(X - X_0)^2, \quad 0 \leq X \leq X_0, \quad T = 0, \tag{2.11}$$

where $T = 0$ is the moment when the surface is sealed. Making the changes of variables,

$$x = \frac{X}{X_0}, \quad t = \frac{D}{X_0^2}T, \quad c = \frac{D}{mX_0^2} = \frac{C}{2C_0},$$

and denoting by $x_0(t)$ the value of x corresponding to $X_0(T)$, the above system is reduced to the following non-dimensional form,

$$\frac{\partial c}{\partial t} = \frac{\partial^2 c}{\partial x^2} - 1, \quad 0 \leq x \leq x_0(t), \tag{2.12}$$

with the corresponding boundary conditions,

$$\frac{\partial c}{\partial x} = 0, \quad x = 0, \quad t \geq 0, \tag{2.13}$$

$$c = \frac{\partial c}{\partial x} = 0, \quad x = x_0(t), \quad t \geq 0, \tag{2.14}$$

$$c = \frac{1}{2}(1 - x)^2, \quad 0 \leq x \leq 1, \quad t = 0, \tag{2.15}$$

where $x_0(0) = 1$. The subscript t in $x_0(t)$ is dropped in the following discussions.

3. Short-time Solution

The condition (2.15) shows that in the steady-state a negative unit gradient of concentration exists at the surface. When the surface is sealed a zero surface gradient is instantaneously imposed in accordance with (2.13). Because of this discontinuity in the surface-gradient numerical methods based on finite differences are liable to give inaccurate solutions in the neighbourhood of the surface for short times. There will be an interval of time, however, before the disturbance at the surface has an effect on

the solution in the neighbourhood of $x = 1$ to any specified degree of accuracy. Thus an analytical solution can be obtained which will provide a suitable approximation for small times, by assuming that the boundary, $x_0 = 1$, does not move initially.

The solution of (2.12) subject to the initial condition (2.15) and the boundary conditions (2.13) and

$$c = 0, \quad x = 1, \quad t \geq 0 \tag{3.1}$$

is found by using Laplace Transforms to be

$$c(x, t) = \frac{1}{2}(1-x)^2 + 2 \sqrt{\left(\frac{t}{\pi}\right)} \sum_{n=0}^{\infty} (-1)^n \left[\exp \left\{ -\left(\frac{2n+2-x}{2\sqrt{t}}\right)^2 \right\} - \exp \left\{ -\left(\frac{2n+x}{2\sqrt{t}}\right)^2 \right\} \right] - \sum_{n=0}^{\infty} (-1)^n \left\{ (2n+2-x) \operatorname{erfc} \left(\frac{2n+2-x}{2\sqrt{t}}\right) - (2n+x) \operatorname{erfc} \left(\frac{2n+x}{2\sqrt{t}}\right) \right\}, \quad 0 \leq x \leq 1, \quad t \geq 0. \tag{3.2}$$

Values of $c(x, t)$ have been computed for $x = 0(0.05) 1.0$. The typical curves of Fig. 1 demonstrate the general shape and confirm that the concentration has not changed within the accuracy of plotting near the boundary at $x = 1$.

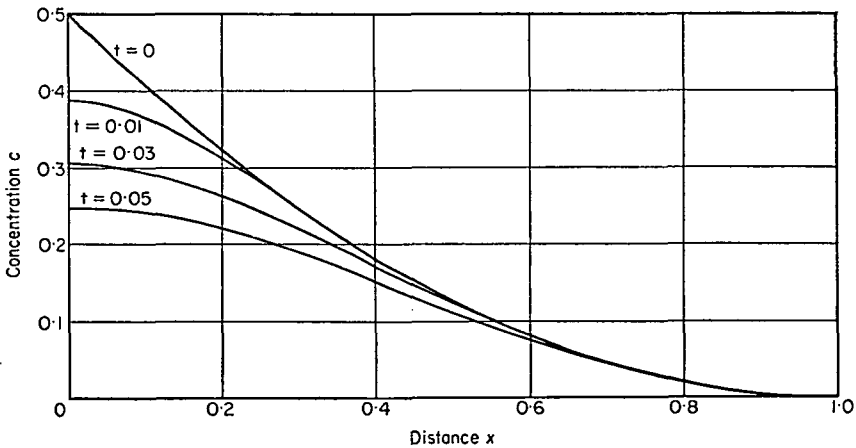


FIG. 1. Concentration distributions for $t < 0.05$ before the boundary moves within the accuracy of plotting.

In computing $c(x, t)$ from (3.2), it is seen that the convergence of the infinite series is very rapid, so that the terms corresponding to $n = 0$ are sufficient over an appreciable interval of time, when the terms less than 10^{-6} are neglected. Furthermore, for $0 \leq t \leq 0.020$, the second and the third series can be ignored to obtain an accuracy nowhere worse than 10^{-5} . The concentration for $0 \leq t \leq 0.020$ can therefore be represented fairly accurately by the approximate expression,

$$c(x, t) = \frac{1}{2}(1-x)^2 - 2 \sqrt{\left(\frac{t}{\pi}\right)} \exp \left\{ -\left(\frac{x}{2\sqrt{t}}\right)^2 \right\} + x \operatorname{erfc} \left(\frac{x}{2\sqrt{t}}\right), \quad 0 \leq x \leq 1. \tag{3.3}$$

4. Numerical Method

Once the boundary has started to move we resort to numerical methods of solution. Several methods have been proposed. Douglas & Gallie (1955) introduced a method of variable time step, keeping the size of the space mesh fixed. Murray & Landis (1959) used a variable space mesh and kept the time step fixed. Ehlrich (1958) employed implicit formula at the intermediate points and Taylor's expansions near the moving boundary in both time and space directions. Lotkin (1960) made use of subdivided differences while Crank (1957) suggested a three-point Lagrange interpolation formula near the moving boundary.

In the present analysis, the concentrations at the intermediate points between the two boundaries have been calculated by using simple explicit finite-difference formulae. Near the moving boundary a Lagrange-type formula has been used, as suggested by Crank (1957) because of convenience in calculation. The location of the moving point itself is determined by a Taylor's series. The method is described below in detail.

The whole region, $0 \leq x \leq 1$, is subdivided into M intervals each of width δx and we take $x_r = r\delta x$ where $0 \leq r \leq M (M\delta x = 1)$.

4.1. Concentrations at the Intermediate Points

We assume that the concentrations at each of the grid points, at the j th time level are known and the position of the moving boundary at that time is somewhere in the r th interval between x_{r-1} and x_r , given by $x_0 = (r-1)\delta x + p^j \delta x$ where p^j is positive and usually less than one, and is also known (Fig. 2). Then the concentrations at the

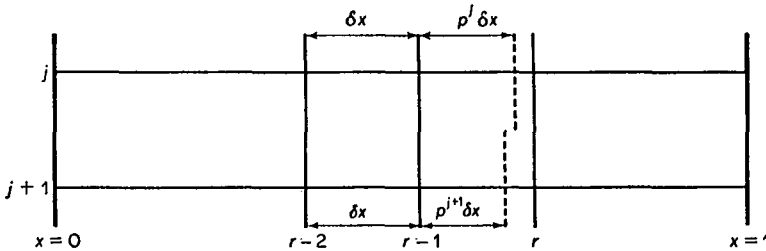


FIG. 2.

$(j+1)$ th time level, up to and including the mesh point $r-2$ can be calculated using the well known explicit formulae,

$$\frac{c_0^{j+1} - c_0^j}{\delta t} = \frac{2}{(\delta x)^2}(c_1^j - c_0^j) - 1, \tag{4.1}$$

$$\frac{c_k^{j+1} - c_k^j}{\delta t} = \frac{1}{(\delta x)^2}(c_{k-1}^j - 2c_k^j + c_{k+1}^j) - 1, \tag{4.2}$$

for $k = 1, 2, \dots, (r-2)$, where δt is the size of the time-step and c_k^j denotes the concentration at point $k\delta x$ at time $j\delta t$.

4.2. Concentration in the Neighbourhood of the Moving Boundary

Let $f(a_0)$, $f(a_1)$ and $f(a_2)$ be any function values corresponding to the arguments a_0 , a_1 and a_2 . A three-point Lagrangian interpolation formula can be written as

$$f(x) = \frac{(x-a_1)(x-a_2)}{(a_0-a_1)(a_0-a_2)}f(a_0) + \frac{(x-a_0)(x-a_2)}{(a_1-a_0)(a_1-a_2)}f(a_1) + \frac{(x-a_0)(x-a_1)}{(a_2-a_0)(a_2-a_1)}f(a_2).$$

Differentiating the above twice with respect to x , we get

$$\frac{\partial^2 f}{\partial x^2} = \frac{2f(a_0)}{(a_0-a_1)(a_0-a_2)} + \frac{2f(a_1)}{(a_1-a_0)(a_1-a_2)} + \frac{2f(a_2)}{(a_2-a_0)(a_2-a_1)}. \quad (4.3)$$

Application of (4.3) at the points $(r-2)\delta x$, $(r-1)\delta x$ and the moving point, and remembering the boundary condition (2.14), gives,

$$\frac{\partial^2 c}{\partial x^2} = \frac{2}{(\delta x)^2} \left(\frac{c_{r-2}}{1+p} - \frac{c_{r-1}}{p} \right) - 1,$$

and the appropriate finite-difference replacement at the point $(r-1)\delta x$ leads to

$$\frac{c_{r-1}^{j+1} - c_{r-1}^j}{\delta t} = \frac{2}{(\delta x)^2} \left(\frac{c_{r-2}^j}{1+p^j} - \frac{c_{r-1}^j}{p^j} \right) - 1, \quad (4.4)$$

an explicit expression for c_{r-1}^{j+1} .

4.3. Position of the Moving Boundary

In order to determine the location of the moving boundary, $x_0(t)$, we first derive some extra conditions there. Differentiation of (2.14) with respect to t , gives

$$\frac{dc}{dt} = \left(\frac{\partial c}{\partial x} \right)_{x=x_0} \left(\frac{dx_0}{dt} \right) + \left(\frac{\partial c}{\partial t} \right)_{x=x_0} = 0. \quad (4.5)$$

By using (2.12) and (2.14) in (4.5) we obtain

$$\frac{\partial^2 c}{\partial x^2} = 1, \quad x = x_0. \quad (4.6)$$

Differentiating (2.12) with respect to x , we get

$$\frac{\partial^2 c}{\partial x \partial t} = \frac{\partial^3 c}{\partial x^3}. \quad (4.7)$$

Again, we have from (2.14)

$$\frac{d}{dt} \left(\frac{\partial c}{\partial x} \right) \left(\frac{\partial^2 c}{\partial x^2} \right)_{x=x_0} \frac{dx_0}{dt} + \left(\frac{\partial^2 c}{\partial t \partial x} \right)_{x=x_0} = 0,$$

and hence using (4.6) and (4.7) in the above and assuming that order of differentiation by x and t can be interchanged we obtain

$$\frac{\partial^3 c}{\partial x^3} = -\frac{dx_0}{dt}, \quad x = x_0,$$

Similarly

$$\frac{\partial^4 c}{\partial x^4} = \left(\frac{dx_0}{dt} \right)^2, \quad \frac{\partial^5 c}{\partial x^5} = -\frac{d^2 x_0}{dt^2} - \left(\frac{dx_0}{dt} \right)^3 \text{ etc.}$$

TABLE 4.1
Values of $10^6 c$ and the positions of the moving boundary. For each time the upper entry corresponds to $\delta x = 0.05$ and the lower entry $\delta x = 0.10$

x t	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	Moving boundary
0.010	387497	365668	310719	243726	179927	125000	80000	45000	20000	5000	1.00000
	393371	369057	311105	243388	179787	124980	79999	45000	20000	5000	1.00000
0.020	340661	326222	287180	233793	176960	124370	79905	44991	19999	5000	1.00000
	344573	329324	288631	234012	176757	124193	79831	44970	19996	4999	0.99999
0.050	247841	240358	219089	187264	149327	109945	73208	42199	18955	4673	0.99709
	250246	242563	220778	188310	149802	110039	73118	42067	18852	4620	0.99612
0.100	143287	139414	128228	110966	89502	66112	43228	23232	8342	619	0.93518
	144974	141031	129651	112108	90330	66643	43515	23345	8344	546	0.93304
0.120	109228	106125	97149	83265	65963	47115	28827	13324	2924	0	0.87885
	110768	107613	98489	84387	66832	47733	29224	13544	2987	0	0.87729
0.140	77937	75442	68233	57105	43322	28536	14730	4249	0	0	0.79756
	79368	76833	69507	58206	44216	29210	15187	4489	0	0	0.79476
0.160	48893	46912	41212	32511	21996	11346	2890	0	0	0	0.68128
	50243	48230	42437	33595	22900	12036	3271	0	0	0	0.68089
0.180	21824	20328	16096	9950	3506	0	0	0	0	0	0.49607
	23119	21597	17289	11010	4285	0	0	0	0	0	0.49257
0.190	9039	7827	4575	750	0	0	0	0	0	0	0.33873
	10319	9082	5703	1353	0	0	0	0	0	0	0.35201
0.195	2880	1909	0	0	0	0	0	0	0	0	0.16128
	4153	3138	0	0	0	0	0	0	0	0	0.17922

http://imamat.oxfordjournals.org/ at Penn State University (Paterno Lib) on September 16, 2016

Now, the Taylor's series for c_{r-1} obtained by expanding about the moving point can be written as

$$\begin{aligned}
 c_{r-1} &= c(x_0) - p\delta x \left(\frac{\partial c}{\partial x}\right)_{x=x_0} + \frac{1}{2}(p\delta x)^2 \left(\frac{\partial^2 c}{\partial x^2}\right)_{x=x_0} - \frac{1}{6}(p\delta x)^3 \frac{\partial^3 c}{\partial x^3} + \dots \\
 &= \frac{1}{2}(p\delta x)^2 + \frac{1}{6}(p\delta x)^3 \frac{dx_0}{dt} + \dots
 \end{aligned}
 \tag{4.8}$$

Provided the boundary is not moving too quickly the first term of the series provides a reasonable approximation and gives

$$p = \frac{\sqrt{(2c_{r-1})}}{\delta x}
 \tag{4.9}$$

We shall see later that the boundary moves faster towards the end of the process and we then replace the finite-difference solution by an analytical expression.

When c_r^{j+1} has been calculated from (4.4), the relation (4.9) gives the position of the moving point at the $(j+1)$ th time level.

4.4. Moving Boundary Crossing a Mesh Line

As c_{r-1} goes on decreasing we look for either of the two possibilities (i) $c_r^{j+1} \leq 0$ or (ii) $c_r^{j+1} > c_{r-1}^j$. With regard to the first condition it is physically impossible for c_{r-1} to go negative. When the second condition is detected, it shows that the numerical process has become unstable. A stability analysis is presented in the appendix to this paper. When either of the two conditions arises, the $(r-1)$ th mesh point is given up at the $(j-1)$ th time level and onwards. The Lagrange formula is then applied to

TABLE 4.2

Comparison between analytical and numerical ($\delta x = 0.05$) solutions for small times. For each time the upper entry corresponds to the analytical solution and the lower entry to numerical solutions. Tabulated values are $10^6 c$

$\frac{x}{t}$	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
0.001	464318 460000	404606 405000	320000 320000	245000 245000	180000 180000	125000 125000	80000 80000	45000 45000	20000 20000	5000 5000
0.002	449538 452000	401927 405000	319973 320000	245000 245000	180000 180000	125000 125000	80000 80000	45000 45000	20000 20000	5000 5000
0.003	438197 437600	397811 398000	319760 320000	244998 245000	180000 180000	125000 125000	80000 80000	45000 45000	20000 20000	5000 5000
0.004	428636 429600	393157 394760	319212 320000	244981 245000	180000 180000	125000 125000	80000 80000	45000 45000	20000 20000	5000 5000
0.005	420213 420320	388238 389128	318302 318976	244924 245000	179999 180000	125000 125000	80000 80000	45000 45000	20000 20000	5000 5000
0.010	387164 387497	365073 365668	309950 310719	243276 243726	179804 179927	124986 125000	79999 80000	45000 45000	20000 20000	5000 5000
0.050	247691 247841	240179 240358	218845 219089	186955 187264	148992 149327	109636 109945	72962 73208	42030 42199	18856 18955	4628 4673

recalculate c_{j-2}^j using a new value of p at the $(j-1)$ th time which is taken to be the old value of p^{j-1} plus one. This process is continued until there are at least two mesh points including the sealed surface. At the end, however, an approximate solution may be useful which is discussed in the next section.

Concentrations have been computed for $\delta x = 0.10, 0.05$ and $\delta t = 0.001$. A comparison is given in Table 4.1 to indicate the order of accuracy of the results. Table 4.2 shows that the values obtained by using $\delta x = 0.05$, are in a very good agreement with those calculated from the Laplace solution, for small times. It should be noted that the numerical solutions involve large errors in the beginning at the surface due to discontinuity in the gradient there at zero time, but they very soon become consistent with the Laplace solutions. At $t = 0.050$, the difference between the numerical and the Laplace solutions is not more than 0.0003 anywhere when the boundary x_0 has moved a distance of 0.003 from its original position $x_0 = 1$.

5. Integral Method

In this section we look for simple analytical expressions for the concentration-distribution as well as for the location of the moving boundary at any given time. We shall make use of an approximate method that was introduced by Goodman (1958) and is usually referred to as the "Integral Method". A review of integral methods and their applications to a variety of transient-heat-transfer problems is to be found in Irvine & Hartnett (1964).

5.1. Description of Integral Method

In applying the Integral Method to the present problem we choose a profile which satisfies all the known conditions. This profile involves the position of the moving point as a parameter to be determined. In order to find a moving point versus time relationship we integrate both sides of the differential equation (2.12) with respect to x over the range for which it is valid, i.e. $0 \leq x \leq x_0$. This means that the differential equation is to be satisfied on average only and not at each point. Thus we obtain

$$\int_0^{x_0} \frac{\partial c}{\partial t} dx = \int_0^{x_0} \frac{\partial^2 c}{\partial x^2} dx - \int_0^{x_0} dx. \quad (5.1)$$

Substituting the concentration profile in (5.1) and after a certain amount of manipulation we get an ordinary differential equation for the position of the moving boundary, x_0 , with t as the independent variable. Once the position of the moving point, x_0 , is determined at any time, substitution of this value for the parameter x_0 in the profile gives the concentration distribution at that time.

5.2. Determination of Surface Concentration

Integral methods are not very amenable in cases of non-uniform initial distributions. In the present problem the discontinuity in the surface gradient is an additional difficulty. In order to apply an integral method we first get an expression for the surface concentration and use it as an additional condition to obtain the profile. We refer to the analytical solution (3.2) which has been obtained assuming the boundary, x_0 , fixed at $x = 1$. As described in Section 3, this solution is true everywhere for

small times i.e. until the boundary has not moved within the range of working accuracy. However, it is observed that the concentrations near the sealed surface have a close agreement with those obtained from the numerical solutions for $\delta x = 0.05$ for all times. Therefore, an expression for surface concentration can be obtained by putting $x = 0$ in (3.2). A closer examination of that expression reveals that the concentration varies linearly with the square-root of the time to an accuracy of 5×10^{-4} , as compared with the numerical solutions, and is given by

$$c(0, t) = \frac{1}{2} - 2 \sqrt{\frac{t}{\pi}}. \quad (5.2)$$

Comparative figures are given in the following table for (i) analytical solution (3.2); (ii) numerical solution for $\delta x = 0.05$ and (iii) approximate solution given by (5.2).

TABLE 5.1
Comparisons of $10^6 c$ at the sealed surface

Time Solutions	0.04	0.08	0.12	0.16	0.18	0.19
Analytical	274328	180852	109134	48771	21546	8546
Numerical	274496	180969	109228	48893	21834	9039
Approximate	274324	180846	109118	48648	21269	8151

It may be mentioned here that the total time, t_1 , for the concentration everywhere to become zero is given by $c(0, t_1) = 0$ and is equal to $\pi/16$ from (5.2).

5.3. Choosing a Polynomial Profile

A polynomial profile of fourth degree is now chosen containing five unknown parameters which might be functions of time and which are determined using (2.13), (2.14), (4.6) and (5.2). On writing c_0 for $c(0, t)$ the equation for the polynomial becomes

$$c(x, x_0) = (1 - x/x_0)^2 \left\{ \frac{1}{2} x^2 + 4c_0(1 - x/x_0) - 3c_0(1 - x/x_0)^2 \right\}. \quad (5.3)$$

This contains the position of the moving point, x_0 , which still has to be determined.

5.4. Determination of the Moving Boundary

To obtain x_0 as a function of time we refer back to the equation (5.1) which gives

$$\int_0^{x_0} \frac{\partial c}{\partial t} dx = \frac{\partial}{\partial t} \int_0^{x_0} c dx = -x_0, \quad (5.4)$$

since $\partial c/\partial x = 0$ at $x = 0, x_0$.

Writing $c(x, x_0)$ from (5.3) in (5.4) and using (5.2) we get, after some manipulation

$$\frac{dx_0}{dt} = -\frac{\{20 - 8/\sqrt{(\pi t)}\} x_0}{x_0^2 + 4 - 16\sqrt{(t/\pi)}}. \quad (5.5)$$

We know that $dx_0/dt \leq 0$. This condition will not be true until

$$20 - \frac{8}{\sqrt{(\pi t)}} \geq 0, \quad (5.6)$$

since the term in the denominator of (5.5) is positive for $0 \leq x_0 \leq 1$ and $t \leq t_1$, where t_1 is obtained from (5.2).

The inequality (5.6) gives the minimum time t_0 for the condition $dx_0/dt \leq 0$ to hold as $4/25\pi$. It should be noted that as the moving point x_0 approaches the sealed surface, its speed dx_0/dt tends to infinity as t tends to t_1 .

We have found that the numerical solution of (5.5) obtained by using a Runge-Kutta algorithm can be approximated by the expression,

$$x_0 = 1 - \exp \left\{ -2 \left(\frac{t_1 - t}{t - t_0} \right)^{\frac{1}{2}} \right\}. \tag{5.7}$$

Table 5.2 below provides a comparison for the position of the moving boundary as obtained from (i) numerical evaluation of (5.5) using Runge-Kutta method (ii) approximation (5.7) and (iii) numerical method of Section 4.

TABLE 5.2
Comparison for $10^4 x_0$ at different times

Time	0-051	0-060	0-080	0-100	0-120	0-140	0-160	0-180	0-190	0-195
Numerical Solution of (5-5)	10000	9974	9750	9321	8686	7817	6634	4892	3505	2331
Approximate solution (5-7)	10000	9996	9817	9393	8779	7962	6848	5092	3478	1760
Numerical Method of section 4.	9967	9922	9719	9352	8788	7975	6812	4959	3381	1618

It is seen from the above table that the numerical solution of (5.5) agrees with the exponential profile for the moving boundary (5.7) very well except for very large times. But the profile (5.7) has a very good agreement with the values obtained from the numerical method for all times. Therefore, (5.2) and (5.3) together with (5.7) constitute an approximate solution. It should be noted that this solution is applicable for the time interval $4/25\pi \leq t \leq \pi/16$ only. For $t \leq 4/25\pi$, Laplace solutions (3.2) and (3.3) give analytical solutions when it has been assumed that the boundary has not moved from its original position $x_0 = 1$. Thus we have got now an analytical solution of the problem for all times.

6. Results and Discussion

The concentrations in the medium at various times together with the position of the moving boundary have been compared in Table 6.1 for numerical and the approximate solutions. A very close agreement is seen between the two solutions. The approximate method would specially be useful (a) to calculate the concentration and the position of the moving boundary at an arbitrary time and (b) at the end when the numerical method would not work because too few mesh points remain. Graphs have been drawn to show the concentration-distributions at various times (Fig. 3) and the progress of the moving boundary with respect to time (Fig. 4).

TABLE 6.1
 Comparison of concentrations $10^{-6}c$ and the distances of the moving boundary from the sealed surface. For each time the upper entry shows values obtained from the approximate solution and the lower entry values from the numerical solution ($\delta x = 0.05$)

$\frac{x}{t}$	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	Moving boundary
0.051	245176 245329	236403 237966	213648 217026	181831 185652	145308 148186	107868 109216	72736 72788	42571 41981	19469 18854	4957 4635	1.00000 0.99673
0.060	223605 223746	215950 217330	195945 198992	167714 171251	137974 137684	101028 102227	68767 68548	40671 39645	18809 17705	4837 4186	0.99957 0.99220
0.100	143175 143287	138758 139414	126795 128338	109243 110996	88096 89502	65385 66112	43176 43228	23569 23232	8703 8342	751 619	0.93934 0.93518
0.150	62981 63157	61083 60928	55236 54494	45725 44602	33529 32453	20315 19668	8443 8298	962 1007	0 0	0 0	0.74538 0.74487
0.180	21269 21824	20771 20328	17750 16096	11681 9950	4387 3506	42 0	0 0	0 0	0 0	0 0	0.50925 0.49607
0.190	8151 9039	8028 7827	5315 4575	925 750	0 0	0 0	0 0	0 0	0 0	0 0	0.34776 0.33873
0.195	1721 2880	1307 1909	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0 0	0.17598 0.16128

Note. For $t < 0.050$ see Table 4.2.

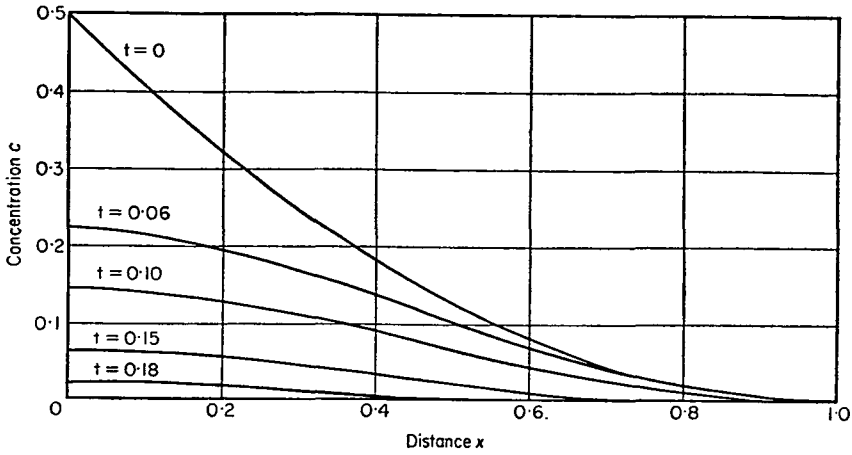


FIG. 3. Concentration distributions for the steady-state ($t = 0$) and for $t > 0.05$.

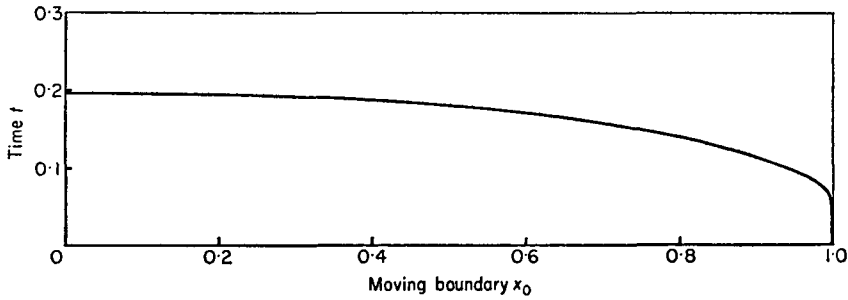


FIG. 4. Position of the moving boundary with respect to time.

REFERENCES

CRANK, J. 1957 *Q. J. Mech. appl. Math.* **10**, 220–231.
 DOUGLAS, J. & GALLIE, T. M. 1955 *Duke math. J.* **22**, 557–570.
 EHRLICH, L. W. 1958 *Journal ACM* **5**, 79–85.
 GOODMAN, T. R. 1958 *ASME Transactions* **80**, 335–342.
 IRVIN, T. F. & HARTNETT, J. P. Eds. 1964 *Advances in heat transfer* **1**. New York: Academic Press.
 LOTKIN, M. 1960 *Q. appl. Math.* **18**, 79–85.
 MUEHLBAUER, J. C. & SUNDERLAND, J. E. 1965 *Appl. Mech. Rev.* **8**, 951–959.
 MURRAY, W. D. & LANDIS, F. 1959 *J. Heat Transfer* **81**, 106–112.

Appendix. Stability Analysis

The set of difference equations connecting values of c at two consecutive time levels can be written in the following matrix form ($r = \delta t / (\delta x)^2$),

$$\begin{bmatrix} c_0^{j+1} \\ c_1^{j+1} \\ \cdot \\ \cdot \\ c_{N-2}^{j+1} \\ c_{N-1}^{j+1} \end{bmatrix} = \begin{bmatrix} 1-2r & 2r & & & & \\ r & 1-2r & r & 0 & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & 0 & r & 1-2r & r \\ & & & & \frac{2r}{1+p^j} & 1-\frac{2r}{p^j} \end{bmatrix} \begin{bmatrix} c_0^j \\ c_1^j \\ \cdot \\ \cdot \\ c_{N-2}^j \\ c_{N-1}^j \end{bmatrix} - \begin{bmatrix} 1 \\ 1 \\ \cdot \\ \cdot \\ 1 \\ 1 \end{bmatrix} \cdot \delta t \quad (1)$$

or

$$c^{j+1} = A_j c^j - U \delta t \quad (2)$$

where A_j is a square matrix of order N which varies with N and U is a column vector each element of which is unity. We see that elements in the last row of A_j are dependent on j and therefore in order to make analysis possible we first replace p^j by a constant value p . Later on conditions are imposed on p in order to make the scheme stable. Equation (2) is then written as

$$c^{j+1} = A c^j - U \delta t. \quad (3)$$

We denote the computed values by ψ so that we have actually solved the equations

$$\psi^{j+1} = A \psi^j - U \delta t. \quad (4)$$

The computational error is then given by subtracting (4) from (3). If the error introduced at the k th step is denoted by the vector e^k , then

$$c^{j+1} - \psi^{j+1} = A(c^j - \psi^j),$$

i.e.

$$e^{j+1} = A e^j. \quad (5)$$

The recurrence relation (5) gives

$$e^{j+1} = (A)^{j+1} e^0, \quad (6)$$

where e^0 is an error vector for the starting values.

Let us express e^0 as the linear combination of the eigenvectors of A , such that

$$e^0 = \sum_{s=1}^N a_s v_s,$$

where v_s is an eigenvector of A corresponding to the eigenvalue λ_s and a_s 's are constants. It is easy to show that

$$e^n = \sum_{s=1}^N a_s \lambda_s^n v_s.$$

For e^n to tend to zero, as n increases, it follows that the largest of $|\lambda_1|, |\lambda_2|, \dots, |\lambda_N|$ must be less than unity. If Q_s is the sum of the moduli of the terms along the s th row excluding the diagonal term a_{ss} in matrix A then by Brauer's theorem every eigenvalue of A lies inside or on the boundary of at least one of the circles $|\lambda - a_{ss}| = Q_s$.

As we are interested in the bounds of p , applying Brauer's theorem to the last row of \mathbf{A} that contains p , we have

$$Q_s = \frac{2r}{1+p}, \quad a_{ss} = 1 - \frac{2r}{p},$$

so that

$$\left| \lambda - \left(1 - \frac{2r}{p} \right) \right| \leq \frac{2r}{1+p}.$$

The bounds for λ are given by

$$\lambda_1 = 1 - \frac{2r}{p(1+p)}; \quad \lambda_2 = \frac{2r(1+2p)}{p(1+p)} - 1.$$

For stability we require $|\lambda_1| \leq 1$, $|\lambda_2| \leq 1$, and hence

$$-1 \leq 1 - \frac{2r}{p(1+p)} \leq 1 \quad \text{giving} \quad \frac{r}{p(1+p)} \leq 1,$$

and

$$-1 \leq \frac{2r(1+2p)}{p(1+p)} \leq 1 \quad \text{giving} \quad \frac{r(1+2p)}{p(1+p)} \leq 1.$$

Since p is always positive, the condition for stability is given by the second inequality because the first one is then satisfied automatically. Therefore, for overall stability

$$p^2 + (1-2r)p - r \geq 0.$$

Since $r \leq \frac{1}{2}$ for the stability of the simple explicit scheme used at the intermediate points, it can be shown that

$$p \geq r - \frac{1}{2} + \sqrt{\left(\frac{1}{2} + r\right)^2}. \quad (7)$$

For $\delta x = 0.1$, $\delta t = 0.001$ we get the stability condition $p \geq 0.11$ and for $\delta x = 0.05$, $\delta t = 0.001$ we have $p \geq 0.54$. This suggests that an instability may arise when the moving point is nearer than 0.011 to the neighbouring mesh point in the first case and 0.027 in the second case ($\delta x = 0.05$). This confirms the need for the stability check described in Section 4.4.

One of us (R. S. G.) has been supported during the course of this work by a studentship awarded by the Science Research Council.