

Convolution solutions (Sect. 6.6).

- ▶ Convolution of two functions.
- ▶ Properties of convolutions.
- ▶ Laplace Transform of a convolution.
- ▶ Impulse response solution.
- ▶ Solution decomposition theorem.

Convolution solutions (Sect. 6.6).

- ▶ **Convolution of two functions.**
- ▶ Properties of convolutions.
- ▶ Laplace Transform of a convolution.
- ▶ Impulse response solution.
- ▶ Solution decomposition theorem.

Convolution of two functions.

Definition

The *convolution* of piecewise continuous functions $f, g : \mathbb{R} \rightarrow \mathbb{R}$ is the function $f * g : \mathbb{R} \rightarrow \mathbb{R}$ given by

$$(f * g)(t) = \int_0^t f(\tau)g(t - \tau) d\tau.$$

Convolution of two functions.

Definition

The *convolution* of piecewise continuous functions $f, g : \mathbb{R} \rightarrow \mathbb{R}$ is the function $f * g : \mathbb{R} \rightarrow \mathbb{R}$ given by

$$(f * g)(t) = \int_0^t f(\tau)g(t - \tau) d\tau.$$

Remarks:

- $f * g$ is also called the generalized product of f and g .

Convolution of two functions.

Definition

The *convolution* of piecewise continuous functions $f, g : \mathbb{R} \rightarrow \mathbb{R}$ is the function $f * g : \mathbb{R} \rightarrow \mathbb{R}$ given by

$$(f * g)(t) = \int_0^t f(\tau)g(t - \tau) d\tau.$$

Remarks:

- ▶ $f * g$ is also called the generalized product of f and g .
- ▶ The definition of convolution of two functions also holds in the case that one of the functions is a generalized function, like Dirac's delta.

Convolution of two functions.

Example

Find the convolution of $f(t) = e^{-t}$ and $g(t) = \sin(t)$.

Convolution of two functions.

Example

Find the convolution of $f(t) = e^{-t}$ and $g(t) = \sin(t)$.

Solution: By definition: $(f * g)(t) = \int_0^t e^{-\tau} \sin(t - \tau) d\tau.$

Convolution of two functions.

Example

Find the convolution of $f(t) = e^{-t}$ and $g(t) = \sin(t)$.

Solution: By definition: $(f * g)(t) = \int_0^t e^{-\tau} \sin(t - \tau) d\tau.$

Integrate by parts twice:

Convolution of two functions.

Example

Find the convolution of $f(t) = e^{-t}$ and $g(t) = \sin(t)$.

Solution: By definition: $(f * g)(t) = \int_0^t e^{-\tau} \sin(t - \tau) d\tau.$

Integrate by parts twice: $\int_0^t e^{-\tau} \sin(t - \tau) d\tau =$

$$\left[e^{-\tau} \cos(t - \tau) \right] \Big|_0^t - \left[e^{-\tau} \sin(t - \tau) \right] \Big|_0^t - \int_0^t e^{-\tau} \sin(t - \tau) d\tau,$$

Convolution of two functions.

Example

Find the convolution of $f(t) = e^{-t}$ and $g(t) = \sin(t)$.

Solution: By definition: $(f * g)(t) = \int_0^t e^{-\tau} \sin(t - \tau) d\tau$.

Integrate by parts twice: $\int_0^t e^{-\tau} \sin(t - \tau) d\tau =$

$$\left[e^{-\tau} \cos(t - \tau) \right] \Big|_0^t - \left[e^{-\tau} \sin(t - \tau) \right] \Big|_0^t - \int_0^t e^{-\tau} \sin(t - \tau) d\tau,$$

$$2 \int_0^t e^{-\tau} \sin(t - \tau) d\tau = \left[e^{-\tau} \cos(t - \tau) \right] \Big|_0^t - \left[e^{-\tau} \sin(t - \tau) \right] \Big|_0^t,$$

Convolution of two functions.

Example

Find the convolution of $f(t) = e^{-t}$ and $g(t) = \sin(t)$.

Solution: By definition: $(f * g)(t) = \int_0^t e^{-\tau} \sin(t - \tau) d\tau$.

Integrate by parts twice: $\int_0^t e^{-\tau} \sin(t - \tau) d\tau =$

$$\left[e^{-\tau} \cos(t - \tau) \right] \Big|_0^t - \left[e^{-\tau} \sin(t - \tau) \right] \Big|_0^t - \int_0^t e^{-\tau} \sin(t - \tau) d\tau,$$

$$2 \int_0^t e^{-\tau} \sin(t - \tau) d\tau = \left[e^{-\tau} \cos(t - \tau) \right] \Big|_0^t - \left[e^{-\tau} \sin(t - \tau) \right] \Big|_0^t,$$

$$2(f * g)(t) = e^{-t} - \cos(t) - 0 + \sin(t).$$

Convolution of two functions.

Example

Find the convolution of $f(t) = e^{-t}$ and $g(t) = \sin(t)$.

Solution: By definition: $(f * g)(t) = \int_0^t e^{-\tau} \sin(t - \tau) d\tau$.

Integrate by parts twice: $\int_0^t e^{-\tau} \sin(t - \tau) d\tau =$

$$\left[e^{-\tau} \cos(t - \tau) \right] \Big|_0^t - \left[e^{-\tau} \sin(t - \tau) \right] \Big|_0^t - \int_0^t e^{-\tau} \sin(t - \tau) d\tau,$$

$$2 \int_0^t e^{-\tau} \sin(t - \tau) d\tau = \left[e^{-\tau} \cos(t - \tau) \right] \Big|_0^t - \left[e^{-\tau} \sin(t - \tau) \right] \Big|_0^t,$$

$$2(f * g)(t) = e^{-t} - \cos(t) - 0 + \sin(t).$$

We conclude: $(f * g)(t) = \frac{1}{2} [e^{-t} + \sin(t) - \cos(t)]$.



Convolution solutions (Sect. 6.6).

- ▶ Convolution of two functions.
- ▶ **Properties of convolutions.**
- ▶ Laplace Transform of a convolution.
- ▶ Impulse response solution.
- ▶ Solution decomposition theorem.

Properties of convolutions.

Theorem (Properties)

For every piecewise continuous functions f , g , and h , hold:

- (i) *Commutativity:* $f * g = g * f$;
- (ii) *Associativity:* $f * (g * h) = (f * g) * h$;
- (iii) *Distributivity:* $f * (g + h) = f * g + f * h$;
- (iv) *Neutral element:* $f * 0 = 0$;
- (v) *Identity element:* $f * \delta = f$.

Properties of convolutions.

Theorem (Properties)

For every piecewise continuous functions f , g , and h , hold:

- (i) *Commutativity*: $f * g = g * f$;
- (ii) *Associativity*: $f * (g * h) = (f * g) * h$;
- (iii) *Distributivity*: $f * (g + h) = f * g + f * h$;
- (iv) *Neutral element*: $f * 0 = 0$;
- (v) *Identity element*: $f * \delta = f$.

Proof:

$$(v): (f * \delta)(t) = \int_0^t f(\tau) \delta(t - \tau) d\tau$$

Properties of convolutions.

Theorem (Properties)

For every piecewise continuous functions f , g , and h , hold:

- (i) *Commutativity*: $f * g = g * f$;
- (ii) *Associativity*: $f * (g * h) = (f * g) * h$;
- (iii) *Distributivity*: $f * (g + h) = f * g + f * h$;
- (iv) *Neutral element*: $f * 0 = 0$;
- (v) *Identity element*: $f * \delta = f$.

Proof:

$$(v): (f * \delta)(t) = \int_0^t f(\tau) \delta(t - \tau) d\tau = f(t).$$

Properties of convolutions.

Proof:

(1): Commutativity: $f * g = g * f$.

Properties of convolutions.

Proof:

(1): Commutativity: $f * g = g * f$.

The definition of convolution is,

$$(f * g)(t) = \int_0^t f(\tau) g(t - \tau) d\tau.$$

Properties of convolutions.

Proof:

(1): Commutativity: $f * g = g * f$.

The definition of convolution is,

$$(f * g)(t) = \int_0^t f(\tau) g(t - \tau) d\tau.$$

Change the integration variable: $\hat{\tau} = t - \tau$,

Properties of convolutions.

Proof:

(1): Commutativity: $f * g = g * f$.

The definition of convolution is,

$$(f * g)(t) = \int_0^t f(\tau) g(t - \tau) d\tau.$$

Change the integration variable: $\hat{\tau} = t - \tau$, hence $d\hat{\tau} = -d\tau$,

Properties of convolutions.

Proof:

(1): Commutativity: $f * g = g * f$.

The definition of convolution is,

$$(f * g)(t) = \int_0^t f(\tau) g(t - \tau) d\tau.$$

Change the integration variable: $\hat{\tau} = t - \tau$, hence $d\hat{\tau} = -d\tau$,

$$(f * g)(t) = \int_t^0 f(t - \hat{\tau}) g(\hat{\tau})(-1) d\hat{\tau}$$

Properties of convolutions.

Proof:

(1): Commutativity: $f * g = g * f$.

The definition of convolution is,

$$(f * g)(t) = \int_0^t f(\tau) g(t - \tau) d\tau.$$

Change the integration variable: $\hat{\tau} = t - \tau$, hence $d\hat{\tau} = -d\tau$,

$$(f * g)(t) = \int_t^0 f(t - \hat{\tau}) g(\hat{\tau})(-1) d\hat{\tau}$$

$$(f * g)(t) = \int_0^t g(\hat{\tau}) f(t - \hat{\tau}) d\hat{\tau}$$

Properties of convolutions.

Proof:

(1): Commutativity: $f * g = g * f$.

The definition of convolution is,

$$(f * g)(t) = \int_0^t f(\tau) g(t - \tau) d\tau.$$

Change the integration variable: $\hat{\tau} = t - \tau$, hence $d\hat{\tau} = -d\tau$,

$$(f * g)(t) = \int_t^0 f(t - \hat{\tau}) g(\hat{\tau})(-1) d\hat{\tau}$$

$$(f * g)(t) = \int_0^t g(\hat{\tau}) f(t - \hat{\tau}) d\hat{\tau}$$

We conclude: $(f * g)(t) = (g * f)(t)$.



Convolution solutions (Sect. 6.6).

- ▶ Convolution of two functions.
- ▶ Properties of convolutions.
- ▶ **Laplace Transform of a convolution.**
- ▶ Impulse response solution.
- ▶ Solution decomposition theorem.

Laplace Transform of a convolution.

Theorem (Laplace Transform)

If f, g have well-defined Laplace Transforms $\mathcal{L}[f], \mathcal{L}[g]$, then

$$\mathcal{L}[f * g] = \mathcal{L}[f] \mathcal{L}[g].$$

Laplace Transform of a convolution.

Theorem (Laplace Transform)

If f, g have well-defined Laplace Transforms $\mathcal{L}[f], \mathcal{L}[g]$, then

$$\mathcal{L}[f * g] = \mathcal{L}[f] \mathcal{L}[g].$$

Proof: The key step is to interchange two integrals.

Laplace Transform of a convolution.

Theorem (Laplace Transform)

If f, g have well-defined Laplace Transforms $\mathcal{L}[f], \mathcal{L}[g]$, then

$$\mathcal{L}[f * g] = \mathcal{L}[f] \mathcal{L}[g].$$

Proof: The key step is to interchange two integrals. We start with the product of the Laplace transforms,

$$\mathcal{L}[f] \mathcal{L}[g] = \left[\int_0^\infty e^{-st} f(t) dt \right] \left[\int_0^\infty e^{-s\tilde{t}} g(\tilde{t}) d\tilde{t} \right],$$

Laplace Transform of a convolution.

Theorem (Laplace Transform)

If f, g have well-defined Laplace Transforms $\mathcal{L}[f], \mathcal{L}[g]$, then

$$\mathcal{L}[f * g] = \mathcal{L}[f] \mathcal{L}[g].$$

Proof: The key step is to interchange two integrals. We start with the product of the Laplace transforms,

$$\mathcal{L}[f] \mathcal{L}[g] = \left[\int_0^\infty e^{-st} f(t) dt \right] \left[\int_0^\infty e^{-s\tilde{t}} g(\tilde{t}) d\tilde{t} \right],$$

$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty e^{-s\tilde{t}} g(\tilde{t}) \left(\int_0^\infty e^{-st} f(t) dt \right) d\tilde{t},$$

Laplace Transform of a convolution.

Theorem (Laplace Transform)

If f, g have well-defined Laplace Transforms $\mathcal{L}[f]$, $\mathcal{L}[g]$, then

$$\mathcal{L}[f * g] = \mathcal{L}[f] \mathcal{L}[g].$$

Proof: The key step is to interchange two integrals. We start with the product of the Laplace transforms,

$$\mathcal{L}[f] \mathcal{L}[g] = \left[\int_0^\infty e^{-st} f(t) dt \right] \left[\int_0^\infty e^{-s\tilde{t}} g(\tilde{t}) d\tilde{t} \right],$$

$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty e^{-s\tilde{t}} g(\tilde{t}) \left(\int_0^\infty e^{-st} f(t) dt \right) d\tilde{t},$$

$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty g(\tilde{t}) \left(\int_0^\infty e^{-s(t+\tilde{t})} f(t) dt \right) d\tilde{t}.$$

Laplace Transform of a convolution.

Proof: Recall: $\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty g(\tilde{t}) \left(\int_0^\infty e^{-s(t+\tilde{t})} f(t) dt \right) d\tilde{t}.$

Laplace Transform of a convolution.

Proof: Recall: $\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty g(\tilde{t}) \left(\int_0^\infty e^{-s(t+\tilde{t})} f(t) dt \right) d\tilde{t}.$

Change variables: $\tau = t + \tilde{t},$

Laplace Transform of a convolution.

Proof: Recall: $\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty g(\tilde{t}) \left(\int_0^\infty e^{-s(t+\tilde{t})} f(t) dt \right) d\tilde{t}.$

Change variables: $\tau = t + \tilde{t}$, hence $d\tau = dt$;

Laplace Transform of a convolution.

Proof: Recall: $\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty g(\tilde{t}) \left(\int_0^\infty e^{-s(t+\tilde{t})} f(t) dt \right) d\tilde{t}.$

Change variables: $\tau = t + \tilde{t}$, hence $d\tau = dt$;

$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty g(\tilde{t}) \left(\int_{\tilde{t}}^\infty e^{-s\tau} f(\tau - \tilde{t}) d\tau \right) d\tilde{t}.$$

Laplace Transform of a convolution.

Proof: Recall: $\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty g(\tilde{t}) \left(\int_0^\infty e^{-s(t+\tilde{t})} f(t) dt \right) d\tilde{t}.$

Change variables: $\tau = t + \tilde{t}$, hence $d\tau = dt$;

$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty g(\tilde{t}) \left(\int_{\tilde{t}}^\infty e^{-s\tau} f(\tau - \tilde{t}) d\tau \right) d\tilde{t}.$$

$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty \int_{\tilde{t}}^\infty e^{-s\tau} g(\tilde{t}) f(\tau - \tilde{t}) d\tau d\tilde{t}.$$

Laplace Transform of a convolution.

Proof: Recall: $\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty g(\tilde{t}) \left(\int_0^\infty e^{-s(t+\tilde{t})} f(t) dt \right) d\tilde{t}.$

Change variables: $\tau = t + \tilde{t}$, hence $d\tau = dt$;

$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty g(\tilde{t}) \left(\int_{\tilde{t}}^\infty e^{-s\tau} f(\tau - \tilde{t}) d\tau \right) d\tilde{t}.$$

$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty \int_{\tilde{t}}^\infty e^{-s\tau} g(\tilde{t}) f(\tau - \tilde{t}) d\tau d\tilde{t}.$$

The key step: Switch the order of integration.

Laplace Transform of a convolution.


Proof: Recall: $\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty g(\tilde{t}) \left(\int_0^\infty e^{-s(t+\tilde{t})} f(t) dt \right) d\tilde{t}.$

Change variables: $\tau = t + \tilde{t}$, hence $d\tau = dt$;

$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty g(\tilde{t}) \left(\int_{\tilde{t}}^\infty e^{-s\tau} f(\tau - \tilde{t}) d\tau \right) d\tilde{t}.$$

$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty \int_{\tilde{t}}^\infty e^{-s\tau} g(\tilde{t}) f(\tau - \tilde{t}) d\tau d\tilde{t}.$$

The key step: Switch the order of integration.



Laplace Transform of a convolution.


Proof: Recall: $\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty g(\tilde{t}) \left(\int_0^\infty e^{-s(t+\tilde{t})} f(t) dt \right) d\tilde{t}.$

Change variables: $\tau = t + \tilde{t}$, hence $d\tau = dt$;

$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty g(\tilde{t}) \left(\int_{\tilde{t}}^\infty e^{-s\tau} f(\tau - \tilde{t}) d\tau \right) d\tilde{t}.$$

$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty \int_{\tilde{t}}^\infty e^{-s\tau} g(\tilde{t}) f(\tau - \tilde{t}) d\tau d\tilde{t}.$$

The key step: Switch the order of integration.



$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty \int_0^\tau e^{-s\tau} g(\tilde{t}) f(\tau - \tilde{t}) d\tilde{t} d\tau.$$

Laplace Transform of a convolution.

Proof: Recall: $\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty \int_0^\tau e^{-s\tau} g(\tilde{t}) f(\tau - \tilde{t}) d\tilde{t} d\tau.$

Laplace Transform of a convolution.

Proof: Recall: $\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty \int_0^\tau e^{-s\tau} g(\tilde{t}) f(\tau - \tilde{t}) d\tilde{t} d\tau.$

Then, is straightforward to check that

$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty e^{-s\tau} \left(\int_0^\tau g(\tilde{t}) f(\tau - \tilde{t}) d\tilde{t} \right) d\tau,$$

Laplace Transform of a convolution.

Proof: Recall: $\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty \int_0^\tau e^{-s\tau} g(\tilde{t}) f(\tau - \tilde{t}) d\tilde{t} d\tau.$

Then, is straightforward to check that

$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty e^{-s\tau} \left(\int_0^\tau g(\tilde{t}) f(\tau - \tilde{t}) d\tilde{t} \right) d\tau,$$

$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty e^{-s\tau} (g * f)(\tau) d\tau$$

Laplace Transform of a convolution.

Proof: Recall: $\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty \int_0^\tau e^{-s\tau} g(\tilde{t}) f(\tau - \tilde{t}) d\tilde{t} d\tau.$

Then, is straightforward to check that

$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty e^{-s\tau} \left(\int_0^\tau g(\tilde{t}) f(\tau - \tilde{t}) d\tilde{t} \right) d\tau,$$

$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty e^{-s\tau} (g * f)(\tau) d\tau$$

$$\mathcal{L}[f] \mathcal{L}[g] = \mathcal{L}[g * f]$$

Laplace Transform of a convolution.

Proof: Recall: $\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty \int_0^\tau e^{-s\tau} g(\tilde{t}) f(\tau - \tilde{t}) d\tilde{t} d\tau.$

Then, is straightforward to check that

$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty e^{-s\tau} \left(\int_0^\tau g(\tilde{t}) f(\tau - \tilde{t}) d\tilde{t} \right) d\tau,$$

$$\mathcal{L}[f] \mathcal{L}[g] = \int_0^\infty e^{-s\tau} (g * f)(\tau) d\tau$$

$$\mathcal{L}[f] \mathcal{L}[g] = \mathcal{L}[g * f]$$

We conclude: $\mathcal{L}[f * g] = \mathcal{L}[f] \mathcal{L}[g].$



Convolution solutions (Sect. 6.6).

- ▶ Convolution of two functions.
- ▶ Properties of convolutions.
- ▶ Laplace Transform of a convolution.
- ▶ **Impulse response solution.**
- ▶ Solution decomposition theorem.

Impulse response solution.

Definition

The *impulse response solution* is the function y_δ solution of the IVP

$$y_\delta'' + a_1 y_\delta' + a_0 y_\delta = \delta(t - c), \quad y_\delta(0) = 0, \quad y_\delta'(0) = 0, \quad c \in \mathbb{R}.$$

Impulse response solution.

Definition

The *impulse response solution* is the function y_δ solution of the IVP

$$y_\delta'' + a_1 y_\delta' + a_0 y_\delta = \delta(t - c), \quad y_\delta(0) = 0, \quad y_\delta'(0) = 0, \quad c \in \mathbb{R}.$$

Example

Find the impulse response solution of the IVP

$$y_\delta'' + 2 y_\delta' + 2 y_\delta = \delta(t - c), \quad y_\delta(0) = 0, \quad y_\delta'(0) = 0.$$

Impulse response solution.

Definition

The *impulse response solution* is the function y_δ solution of the IVP

$$y_\delta'' + a_1 y_\delta' + a_0 y_\delta = \delta(t - c), \quad y_\delta(0) = 0, \quad y_\delta'(0) = 0, \quad c \in \mathbb{R}.$$

Example

Find the impulse response solution of the IVP

$$y_\delta'' + 2 y_\delta' + 2 y_\delta = \delta(t - c), \quad y_\delta(0) = 0, \quad y_\delta'(0) = 0.$$

Solution: $\mathcal{L}[y_\delta''] + 2 \mathcal{L}[y_\delta'] + 2 \mathcal{L}[y_\delta] = \mathcal{L}[\delta(t - c)]$.

Impulse response solution.

Definition

The *impulse response solution* is the function y_δ solution of the IVP

$$y_\delta'' + a_1 y_\delta' + a_0 y_\delta = \delta(t - c), \quad y_\delta(0) = 0, \quad y_\delta'(0) = 0, \quad c \in \mathbb{R}.$$

Example

Find the impulse response solution of the IVP

$$y_\delta'' + 2 y_\delta' + 2 y_\delta = \delta(t - c), \quad y_\delta(0) = 0, \quad y_\delta'(0) = 0.$$

Solution: $\mathcal{L}[y_\delta''] + 2 \mathcal{L}[y_\delta'] + 2 \mathcal{L}[y_\delta] = \mathcal{L}[\delta(t - c)]$.

$$(s^2 + 2s + 2) \mathcal{L}[y_\delta] = e^{-cs}$$

Impulse response solution.

Definition

The *impulse response solution* is the function y_δ solution of the IVP

$$y_\delta'' + a_1 y_\delta' + a_0 y_\delta = \delta(t - c), \quad y_\delta(0) = 0, \quad y_\delta'(0) = 0, \quad c \in \mathbb{R}.$$

Example

Find the impulse response solution of the IVP

$$y_\delta'' + 2 y_\delta' + 2 y_\delta = \delta(t - c), \quad y_\delta(0) = 0, \quad y_\delta'(0) = 0.$$

Solution: $\mathcal{L}[y_\delta''] + 2 \mathcal{L}[y_\delta'] + 2 \mathcal{L}[y_\delta] = \mathcal{L}[\delta(t - c)]$.

$$(s^2 + 2s + 2) \mathcal{L}[y_\delta] = e^{-cs} \quad \Rightarrow \quad \mathcal{L}[y_\delta] = \frac{e^{-cs}}{(s^2 + 2s + 2)}.$$

Impulse response solution.

Example

Find the impulse response solution of the IVP

$$y_{\delta}'' + 2 y_{\delta}' + 2 y_{\delta} = \delta(t - c), \quad y_{\delta}(0) = 0, \quad y_{\delta}'(0) = 0, .$$

Solution: Recall: $\mathcal{L}[y_{\delta}] = \frac{e^{-cs}}{(s^2 + 2s + 2)}.$

Impulse response solution.

Example

Find the impulse response solution of the IVP

$$y_{\delta}'' + 2 y_{\delta}' + 2 y_{\delta} = \delta(t - c), \quad y_{\delta}(0) = 0, \quad y_{\delta}'(0) = 0, .$$

Solution: Recall: $\mathcal{L}[y_{\delta}] = \frac{e^{-cs}}{(s^2 + 2s + 2)}.$

Find the roots of the denominator,

$$s^2 + 2s + 2 = 0$$

Impulse response solution.

Example

Find the impulse response solution of the IVP

$$y_{\delta}'' + 2 y_{\delta}' + 2 y_{\delta} = \delta(t - c), \quad y_{\delta}(0) = 0, \quad y_{\delta}'(0) = 0, .$$

Solution: Recall: $\mathcal{L}[y_{\delta}] = \frac{e^{-cs}}{(s^2 + 2s + 2)}$.

Find the roots of the denominator,

$$s^2 + 2s + 2 = 0 \quad \Rightarrow \quad s_{\pm} = \frac{1}{2} [-2 \pm \sqrt{4 - 8}]$$

Impulse response solution.

Example

Find the impulse response solution of the IVP

$$y_{\delta}'' + 2 y_{\delta}' + 2 y_{\delta} = \delta(t - c), \quad y_{\delta}(0) = 0, \quad y_{\delta}'(0) = 0, .$$

Solution: Recall: $\mathcal{L}[y_{\delta}] = \frac{e^{-cs}}{(s^2 + 2s + 2)}$.

Find the roots of the denominator,

$$s^2 + 2s + 2 = 0 \quad \Rightarrow \quad s_{\pm} = \frac{1}{2} [-2 \pm \sqrt{4 - 8}]$$

Complex roots.

Impulse response solution.

Example

Find the impulse response solution of the IVP

$$y_{\delta}'' + 2 y_{\delta}' + 2 y_{\delta} = \delta(t - c), \quad y_{\delta}(0) = 0, \quad y_{\delta}'(0) = 0, .$$

Solution: Recall: $\mathcal{L}[y_{\delta}] = \frac{e^{-cs}}{(s^2 + 2s + 2)}.$

Find the roots of the denominator,

$$s^2 + 2s + 2 = 0 \quad \Rightarrow \quad s_{\pm} = \frac{1}{2} [-2 \pm \sqrt{4 - 8}]$$

Complex roots. We complete the square:

Impulse response solution.

Example

Find the impulse response solution of the IVP

$$y_{\delta}'' + 2 y_{\delta}' + 2 y_{\delta} = \delta(t - c), \quad y_{\delta}(0) = 0, \quad y_{\delta}'(0) = 0, .$$

Solution: Recall: $\mathcal{L}[y_{\delta}] = \frac{e^{-cs}}{(s^2 + 2s + 2)}.$

Find the roots of the denominator,

$$s^2 + 2s + 2 = 0 \quad \Rightarrow \quad s_{\pm} = \frac{1}{2} [-2 \pm \sqrt{4 - 8}]$$

Complex roots. We complete the square:

$$s^2 + 2s + 2 = \left[s^2 + 2\left(\frac{2}{2}\right)s + 1 \right] - 1 + 2$$

Impulse response solution.

Example

Find the impulse response solution of the IVP

$$y''_{\delta} + 2 y'_{\delta} + 2 y_{\delta} = \delta(t - c), \quad y_{\delta}(0) = 0, \quad y'_{\delta}(0) = 0, .$$

Solution: Recall: $\mathcal{L}[y_{\delta}] = \frac{e^{-cs}}{(s^2 + 2s + 2)}.$

Find the roots of the denominator,

$$s^2 + 2s + 2 = 0 \quad \Rightarrow \quad s_{\pm} = \frac{1}{2} [-2 \pm \sqrt{4 - 8}]$$

Complex roots. We complete the square:

$$s^2 + 2s + 2 = \left[s^2 + 2\left(\frac{2}{2}\right)s + 1 \right] - 1 + 2 = (s + 1)^2 + 1.$$

Impulse response solution.

Example

Find the impulse response solution of the IVP

$$y''_{\delta} + 2 y'_{\delta} + 2 y_{\delta} = \delta(t - c), \quad y_{\delta}(0) = 0, \quad y'_{\delta}(0) = 0, .$$

Solution: Recall: $\mathcal{L}[y_{\delta}] = \frac{e^{-cs}}{(s^2 + 2s + 2)}$.

Find the roots of the denominator,

$$s^2 + 2s + 2 = 0 \quad \Rightarrow \quad s_{\pm} = \frac{1}{2} [-2 \pm \sqrt{4 - 8}]$$

Complex roots. We complete the square:

$$s^2 + 2s + 2 = \left[s^2 + 2\left(\frac{2}{2}\right)s + 1 \right] - 1 + 2 = (s + 1)^2 + 1.$$

Therefore, $\mathcal{L}[y_{\delta}] = \frac{e^{-cs}}{(s + 1)^2 + 1}$.

Impulse response solution.

Example

Find the impulse response solution of the IVP

$$y_{\delta}'' + 2y_{\delta}' + 2y_{\delta} = \delta(t - c), \quad y_{\delta}(0) = 0, \quad y_{\delta}'(0) = 0, .$$

Solution: Recall: $\mathcal{L}[y_{\delta}] = \frac{e^{-cs}}{(s+1)^2 + 1}.$

Impulse response solution.

Example

Find the impulse response solution of the IVP

$$y_{\delta}'' + 2y_{\delta}' + 2y_{\delta} = \delta(t - c), \quad y_{\delta}(0) = 0, \quad y_{\delta}'(0) = 0, .$$

Solution: Recall: $\mathcal{L}[y_{\delta}] = \frac{e^{-cs}}{(s+1)^2 + 1}.$

Recall: $\mathcal{L}[\sin(t)] = \frac{1}{s^2 + 1},$

Impulse response solution.

Example

Find the impulse response solution of the IVP

$$y_{\delta}'' + 2y_{\delta}' + 2y_{\delta} = \delta(t - c), \quad y_{\delta}(0) = 0, \quad y_{\delta}'(0) = 0, .$$

Solution: Recall: $\mathcal{L}[y_{\delta}] = \frac{e^{-cs}}{(s+1)^2 + 1}.$

Recall: $\mathcal{L}[\sin(t)] = \frac{1}{s^2 + 1},$ and $\mathcal{L}[f](s - c) = \mathcal{L}[e^{ct} f(t)].$

Impulse response solution.

Example

Find the impulse response solution of the IVP

$$y''_{\delta} + 2y'_{\delta} + 2y_{\delta} = \delta(t - c), \quad y_{\delta}(0) = 0, \quad y'_{\delta}(0) = 0, .$$

Solution: Recall: $\mathcal{L}[y_{\delta}] = \frac{e^{-cs}}{(s+1)^2 + 1}.$

Recall: $\mathcal{L}[\sin(t)] = \frac{1}{s^2 + 1},$ and $\mathcal{L}[f](s - c) = \mathcal{L}[e^{ct} f(t)].$

$$\frac{1}{(s+1)^2 + 1} = \mathcal{L}[e^{-t} \sin(t)]$$

Impulse response solution.

Example

Find the impulse response solution of the IVP

$$y_{\delta}'' + 2 y_{\delta}' + 2 y_{\delta} = \delta(t - c), \quad y_{\delta}(0) = 0, \quad y_{\delta}'(0) = 0, .$$

Solution: Recall: $\mathcal{L}[y_{\delta}] = \frac{e^{-cs}}{(s+1)^2 + 1}.$

Recall: $\mathcal{L}[\sin(t)] = \frac{1}{s^2 + 1},$ and $\mathcal{L}[f](s - c) = \mathcal{L}[e^{ct} f(t)].$

$$\frac{1}{(s+1)^2 + 1} = \mathcal{L}[e^{-t} \sin(t)] \quad \Rightarrow \quad \mathcal{L}[y_{\delta}] = e^{-cs} \mathcal{L}[e^{-t} \sin(t)].$$

Impulse response solution.

Example

Find the impulse response solution of the IVP

$$y''_{\delta} + 2 y'_{\delta} + 2 y_{\delta} = \delta(t - c), \quad y_{\delta}(0) = 0, \quad y'_{\delta}(0) = 0, .$$

Solution: Recall: $\mathcal{L}[y_{\delta}] = \frac{e^{-cs}}{(s+1)^2 + 1}.$

Recall: $\mathcal{L}[\sin(t)] = \frac{1}{s^2 + 1},$ and $\mathcal{L}[f](s - c) = \mathcal{L}[e^{ct} f(t)].$

$$\frac{1}{(s+1)^2 + 1} = \mathcal{L}[e^{-t} \sin(t)] \quad \Rightarrow \quad \mathcal{L}[y_{\delta}] = e^{-cs} \mathcal{L}[e^{-t} \sin(t)].$$

Since $e^{-cs} \mathcal{L}[f](s) = \mathcal{L}[u(t - c) f(t - c)],$

Impulse response solution.

Example

Find the impulse response solution of the IVP

$$y_{\delta}'' + 2 y_{\delta}' + 2 y_{\delta} = \delta(t - c), \quad y_{\delta}(0) = 0, \quad y_{\delta}'(0) = 0, .$$

Solution: Recall: $\mathcal{L}[y_{\delta}] = \frac{e^{-cs}}{(s+1)^2 + 1}.$

Recall: $\mathcal{L}[\sin(t)] = \frac{1}{s^2 + 1},$ and $\mathcal{L}[f](s - c) = \mathcal{L}[e^{ct} f(t)].$

$$\frac{1}{(s+1)^2 + 1} = \mathcal{L}[e^{-t} \sin(t)] \quad \Rightarrow \quad \mathcal{L}[y_{\delta}] = e^{-cs} \mathcal{L}[e^{-t} \sin(t)].$$

Since $e^{-cs} \mathcal{L}[f](s) = \mathcal{L}[u(t - c) f(t - c)],$

we conclude $y_{\delta}(t) = u(t - c) e^{-(t-c)} \sin(t - c).$



Convolution solutions (Sect. 6.6).

- ▶ Convolution of two functions.
- ▶ Properties of convolutions.
- ▶ Laplace Transform of a convolution.
- ▶ Impulse response solution.
- ▶ **Solution decomposition theorem.**

Solution decomposition theorem.

Theorem (Solution decomposition)

The solution y to the IVP

$$y'' + a_1 y' + a_0 y = g(t), \quad y(0) = y_0, \quad y'(0) = y_1,$$

can be decomposed as

$$y(t) = y_h(t) + (y_\delta * g)(t),$$

where y_h is the solution of the homogeneous IVP

$$y_h'' + a_1 y_h' + a_0 y_h = 0, \quad y_h(0) = y_0, \quad y_h'(0) = y_1,$$

and y_δ is the impulse response solution, that is,

$$y_\delta'' + a_1 y_\delta' + a_0 y_\delta = \delta(t), \quad y_\delta(0) = 0, \quad y_\delta'(0) = 0.$$

Solution decomposition theorem.

Example

Use the Solution Decomposition Theorem to express the solution of

$$y'' + 2y' + 2y = \sin(at), \quad y(0) = 1, \quad y'(0) = -1.$$

Solution decomposition theorem.

Example

Use the Solution Decomposition Theorem to express the solution of

$$y'' + 2y' + 2y = \sin(at), \quad y(0) = 1, \quad y'(0) = -1.$$

Solution: $\mathcal{L}[y''] + 2\mathcal{L}[y'] + 2\mathcal{L}[y] = \mathcal{L}[\sin(at)],$

Solution decomposition theorem.

Example

Use the Solution Decomposition Theorem to express the solution of

$$y'' + 2y' + 2y = \sin(at), \quad y(0) = 1, \quad y'(0) = -1.$$

Solution: $\mathcal{L}[y''] + 2\mathcal{L}[y'] + 2\mathcal{L}[y] = \mathcal{L}[\sin(at)]$, and recall,

$$\mathcal{L}[y''] = s^2 \mathcal{L}[y] - s(1) - (-1),$$

Solution decomposition theorem.

Example

Use the Solution Decomposition Theorem to express the solution of

$$y'' + 2y' + 2y = \sin(at), \quad y(0) = 1, \quad y'(0) = -1.$$

Solution: $\mathcal{L}[y''] + 2\mathcal{L}[y'] + 2\mathcal{L}[y] = \mathcal{L}[\sin(at)]$, and recall,

$$\mathcal{L}[y''] = s^2 \mathcal{L}[y] - s(1) - (-1), \quad \mathcal{L}[y'] = s \mathcal{L}[y] - 1.$$

Solution decomposition theorem.

Example

Use the Solution Decomposition Theorem to express the solution of

$$y'' + 2y' + 2y = \sin(at), \quad y(0) = 1, \quad y'(0) = -1.$$

Solution: $\mathcal{L}[y''] + 2\mathcal{L}[y'] + 2\mathcal{L}[y] = \mathcal{L}[\sin(at)]$, and recall,

$$\mathcal{L}[y''] = s^2 \mathcal{L}[y] - s(1) - (-1), \quad \mathcal{L}[y'] = s \mathcal{L}[y] - 1.$$

$$(s^2 + 2s + 2) \mathcal{L}[y] - s + 1 - 2 = \mathcal{L}[\sin(at)].$$

Solution decomposition theorem.

Example

Use the Solution Decomposition Theorem to express the solution of

$$y'' + 2y' + 2y = \sin(at), \quad y(0) = 1, \quad y'(0) = -1.$$

Solution: $\mathcal{L}[y''] + 2\mathcal{L}[y'] + 2\mathcal{L}[y] = \mathcal{L}[\sin(at)]$, and recall,

$$\mathcal{L}[y''] = s^2 \mathcal{L}[y] - s(1) - (-1), \quad \mathcal{L}[y'] = s \mathcal{L}[y] - 1.$$

$$(s^2 + 2s + 2) \mathcal{L}[y] - s + 1 - 2 = \mathcal{L}[\sin(at)].$$

$$\mathcal{L}[y] = \frac{(s+1)}{(s^2 + 2s + 2)} + \frac{1}{(s^2 + 2s + 2)} \mathcal{L}[\sin(at)].$$

Solution decomposition theorem.

Example

Use the Solution Decomposition Theorem to express the solution of

$$y'' + 2y' + 2y = \sin(at), \quad y(0) = 1, \quad y'(0) = -1.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s+1)}{(s^2+2s+2)} + \frac{1}{(s^2+2s+2)} \mathcal{L}[\sin(at)].$

Solution decomposition theorem.

Example

Use the Solution Decomposition Theorem to express the solution of

$$y'' + 2y' + 2y = \sin(at), \quad y(0) = 1, \quad y'(0) = -1.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s+1)}{(s^2+2s+2)} + \frac{1}{(s^2+2s+2)} \mathcal{L}[\sin(at)]$.

But: $\mathcal{L}[y_h] = \frac{(s+1)}{(s^2+2s+2)}$

Solution decomposition theorem.

Example

Use the Solution Decomposition Theorem to express the solution of

$$y'' + 2y' + 2y = \sin(at), \quad y(0) = 1, \quad y'(0) = -1.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s+1)}{(s^2+2s+2)} + \frac{1}{(s^2+2s+2)} \mathcal{L}[\sin(at)]$.

$$\text{But: } \mathcal{L}[y_h] = \frac{(s+1)}{(s^2+2s+2)} = \frac{(s+1)}{(s+1)^2+1}$$

Solution decomposition theorem.

Example

Use the Solution Decomposition Theorem to express the solution of

$$y'' + 2y' + 2y = \sin(at), \quad y(0) = 1, \quad y'(0) = -1.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s+1)}{(s^2+2s+2)} + \frac{1}{(s^2+2s+2)} \mathcal{L}[\sin(at)]$.

But: $\mathcal{L}[y_h] = \frac{(s+1)}{(s^2+2s+2)} = \frac{(s+1)}{(s+1)^2+1} = \mathcal{L}[e^{-t} \cos(t)],$

Solution decomposition theorem.

Example

Use the Solution Decomposition Theorem to express the solution of

$$y'' + 2y' + 2y = \sin(at), \quad y(0) = 1, \quad y'(0) = -1.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s+1)}{(s^2+2s+2)} + \frac{1}{(s^2+2s+2)} \mathcal{L}[\sin(at)].$

But: $\mathcal{L}[y_h] = \frac{(s+1)}{(s^2+2s+2)} = \frac{(s+1)}{(s+1)^2+1} = \mathcal{L}[e^{-t} \cos(t)],$

and: $\mathcal{L}[y_\delta] = \frac{1}{(s^2+2s+2)}$

Solution decomposition theorem.

Example

Use the Solution Decomposition Theorem to express the solution of

$$y'' + 2y' + 2y = \sin(at), \quad y(0) = 1, \quad y'(0) = -1.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s+1)}{(s^2+2s+2)} + \frac{1}{(s^2+2s+2)} \mathcal{L}[\sin(at)]$.

$$\text{But: } \mathcal{L}[y_h] = \frac{(s+1)}{(s^2+2s+2)} = \frac{(s+1)}{(s+1)^2+1} = \mathcal{L}[e^{-t} \cos(t)],$$

$$\text{and: } \mathcal{L}[y_\delta] = \frac{1}{(s^2+2s+2)} = \frac{1}{(s+1)^2+1}$$

Solution decomposition theorem.

Example

Use the Solution Decomposition Theorem to express the solution of

$$y'' + 2y' + 2y = \sin(at), \quad y(0) = 1, \quad y'(0) = -1.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s+1)}{(s^2+2s+2)} + \frac{1}{(s^2+2s+2)} \mathcal{L}[\sin(at)].$

But: $\mathcal{L}[y_h] = \frac{(s+1)}{(s^2+2s+2)} = \frac{(s+1)}{(s+1)^2+1} = \mathcal{L}[e^{-t} \cos(t)],$

and: $\mathcal{L}[y_\delta] = \frac{1}{(s^2+2s+2)} = \frac{1}{(s+1)^2+1} = \mathcal{L}[e^{-t} \sin(t)].$

Solution decomposition theorem.

Example

Use the Solution Decomposition Theorem to express the solution of

$$y'' + 2y' + 2y = \sin(at), \quad y(0) = 1, \quad y'(0) = -1.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s+1)}{(s^2+2s+2)} + \frac{1}{(s^2+2s+2)} \mathcal{L}[\sin(at)].$

But: $\mathcal{L}[y_h] = \frac{(s+1)}{(s^2+2s+2)} = \frac{(s+1)}{(s+1)^2+1} = \mathcal{L}[e^{-t} \cos(t)],$

and: $\mathcal{L}[y_\delta] = \frac{1}{(s^2+2s+2)} = \frac{1}{(s+1)^2+1} = \mathcal{L}[e^{-t} \sin(t)].$ So,

$$\mathcal{L}[y] = \mathcal{L}[y_h] + \mathcal{L}[y_\delta] \mathcal{L}[g(t)]$$

Solution decomposition theorem.

Example

Use the Solution Decomposition Theorem to express the solution of

$$y'' + 2y' + 2y = \sin(at), \quad y(0) = 1, \quad y'(0) = -1.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s+1)}{(s^2+2s+2)} + \frac{1}{(s^2+2s+2)} \mathcal{L}[\sin(at)].$

But: $\mathcal{L}[y_h] = \frac{(s+1)}{(s^2+2s+2)} = \frac{(s+1)}{(s+1)^2+1} = \mathcal{L}[e^{-t} \cos(t)],$

and: $\mathcal{L}[y_\delta] = \frac{1}{(s^2+2s+2)} = \frac{1}{(s+1)^2+1} = \mathcal{L}[e^{-t} \sin(t)].$ So,

$$\mathcal{L}[y] = \mathcal{L}[y_h] + \mathcal{L}[y_\delta] \mathcal{L}[g(t)] \quad \Rightarrow \quad y(t) = y_h(t) + (y_\delta * g)(t),$$

Solution decomposition theorem.

Example

Use the Solution Decomposition Theorem to express the solution of

$$y'' + 2y' + 2y = \sin(at), \quad y(0) = 1, \quad y'(0) = -1.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s+1)}{(s^2+2s+2)} + \frac{1}{(s^2+2s+2)} \mathcal{L}[\sin(at)]$.

But: $\mathcal{L}[y_h] = \frac{(s+1)}{(s^2+2s+2)} = \frac{(s+1)}{(s+1)^2+1} = \mathcal{L}[e^{-t} \cos(t)],$

and: $\mathcal{L}[y_\delta] = \frac{1}{(s^2+2s+2)} = \frac{1}{(s+1)^2+1} = \mathcal{L}[e^{-t} \sin(t)].$ So,

$$\mathcal{L}[y] = \mathcal{L}[y_h] + \mathcal{L}[y_\delta] \mathcal{L}[g(t)] \Rightarrow y(t) = y_h(t) + (y_\delta * g)(t),$$

So: $y(t) = e^{-t} \cos(t) + \int_0^t e^{-\tau} \sin(\tau) \sin[a(t-\tau)] d\tau. \quad \triangleleft$

Solution decomposition theorem.

Proof: Compute: $\mathcal{L}[y''] + a_1 \mathcal{L}[y'] + a_0 \mathcal{L}[y] = \mathcal{L}[g(t)],$

Solution decomposition theorem.

Proof: Compute: $\mathcal{L}[y''] + a_1 \mathcal{L}[y'] + a_0 \mathcal{L}[y] = \mathcal{L}[g(t)]$, and recall,

$$\mathcal{L}[y''] = s^2 \mathcal{L}[y] - sy_0 - y_1,$$

Solution decomposition theorem.

Proof: Compute: $\mathcal{L}[y''] + a_1 \mathcal{L}[y'] + a_0 \mathcal{L}[y] = \mathcal{L}[g(t)]$, and recall,

$$\mathcal{L}[y''] = s^2 \mathcal{L}[y] - sy_0 - y_1, \quad \mathcal{L}[y'] = s \mathcal{L}[y] - y_0.$$

Solution decomposition theorem.

Proof: Compute: $\mathcal{L}[y''] + a_1 \mathcal{L}[y'] + a_0 \mathcal{L}[y] = \mathcal{L}[g(t)]$, and recall,

$$\mathcal{L}[y''] = s^2 \mathcal{L}[y] - sy_0 - y_1, \quad \mathcal{L}[y'] = s \mathcal{L}[y] - y_0.$$

$$(s^2 + a_1 s + a_0) \mathcal{L}[y] - sy_0 - y_1 - a_1 y_0 = \mathcal{L}[g(t)].$$

Solution decomposition theorem.

Proof: Compute: $\mathcal{L}[y''] + a_1 \mathcal{L}[y'] + a_0 \mathcal{L}[y] = \mathcal{L}[g(t)]$, and recall,

$$\mathcal{L}[y''] = s^2 \mathcal{L}[y] - sy_0 - y_1, \quad \mathcal{L}[y'] = s \mathcal{L}[y] - y_0.$$

$$(s^2 + a_1 s + a_0) \mathcal{L}[y] - sy_0 - y_1 - a_1 y_0 = \mathcal{L}[g(t)].$$

$$\mathcal{L}[y] = \frac{(s + a_1)y_0 + y_1}{(s^2 + a_1 s + a_0)} + \frac{1}{(s^2 + a_1 s + a_0)} \mathcal{L}[g(t)].$$

Solution decomposition theorem.

Proof: Compute: $\mathcal{L}[y''] + a_1 \mathcal{L}[y'] + a_0 \mathcal{L}[y] = \mathcal{L}[g(t)]$, and recall,

$$\mathcal{L}[y''] = s^2 \mathcal{L}[y] - sy_0 - y_1, \quad \mathcal{L}[y'] = s \mathcal{L}[y] - y_0.$$

$$(s^2 + a_1 s + a_0) \mathcal{L}[y] - sy_0 - y_1 - a_1 y_0 = \mathcal{L}[g(t)].$$

$$\mathcal{L}[y] = \frac{(s + a_1)y_0 + y_1}{(s^2 + a_1 s + a_0)} + \frac{1}{(s^2 + a_1 s + a_0)} \mathcal{L}[g(t)].$$

$$\text{Recall: } \mathcal{L}[y_h] = \frac{(s + a_1)y_0 + y_1}{(s^2 + a_1 s + a_0)},$$

Solution decomposition theorem.

Proof: Compute: $\mathcal{L}[y''] + a_1 \mathcal{L}[y'] + a_0 \mathcal{L}[y] = \mathcal{L}[g(t)]$, and recall,

$$\mathcal{L}[y''] = s^2 \mathcal{L}[y] - sy_0 - y_1, \quad \mathcal{L}[y'] = s \mathcal{L}[y] - y_0.$$

$$(s^2 + a_1 s + a_0) \mathcal{L}[y] - sy_0 - y_1 - a_1 y_0 = \mathcal{L}[g(t)].$$

$$\mathcal{L}[y] = \frac{(s + a_1)y_0 + y_1}{(s^2 + a_1 s + a_0)} + \frac{1}{(s^2 + a_1 s + a_0)} \mathcal{L}[g(t)].$$

$$\text{Recall: } \mathcal{L}[y_h] = \frac{(s + a_1)y_0 + y_1}{(s^2 + a_1 s + a_0)}, \quad \text{and} \quad \mathcal{L}[y_\delta] = \frac{1}{(s^2 + a_1 s + a_0)}.$$

Solution decomposition theorem.

Proof: Compute: $\mathcal{L}[y''] + a_1 \mathcal{L}[y'] + a_0 \mathcal{L}[y] = \mathcal{L}[g(t)]$, and recall,

$$\mathcal{L}[y''] = s^2 \mathcal{L}[y] - sy_0 - y_1, \quad \mathcal{L}[y'] = s \mathcal{L}[y] - y_0.$$

$$(s^2 + a_1 s + a_0) \mathcal{L}[y] - sy_0 - y_1 - a_1 y_0 = \mathcal{L}[g(t)].$$

$$\mathcal{L}[y] = \frac{(s + a_1)y_0 + y_1}{(s^2 + a_1 s + a_0)} + \frac{1}{(s^2 + a_1 s + a_0)} \mathcal{L}[g(t)].$$

$$\text{Recall: } \mathcal{L}[y_h] = \frac{(s + a_1)y_0 + y_1}{(s^2 + a_1 s + a_0)}, \quad \text{and} \quad \mathcal{L}[y_\delta] = \frac{1}{(s^2 + a_1 s + a_0)}.$$

$$\text{Since, } \mathcal{L}[y] = \mathcal{L}[y_h] + \mathcal{L}[y_\delta] \mathcal{L}[g(t)],$$

Solution decomposition theorem.

Proof: Compute: $\mathcal{L}[y''] + a_1 \mathcal{L}[y'] + a_0 \mathcal{L}[y] = \mathcal{L}[g(t)]$, and recall,

$$\mathcal{L}[y''] = s^2 \mathcal{L}[y] - sy_0 - y_1, \quad \mathcal{L}[y'] = s \mathcal{L}[y] - y_0.$$

$$(s^2 + a_1 s + a_0) \mathcal{L}[y] - sy_0 - y_1 - a_1 y_0 = \mathcal{L}[g(t)].$$

$$\mathcal{L}[y] = \frac{(s + a_1)y_0 + y_1}{(s^2 + a_1 s + a_0)} + \frac{1}{(s^2 + a_1 s + a_0)} \mathcal{L}[g(t)].$$

$$\text{Recall: } \mathcal{L}[y_h] = \frac{(s + a_1)y_0 + y_1}{(s^2 + a_1 s + a_0)}, \text{ and } \mathcal{L}[y_\delta] = \frac{1}{(s^2 + a_1 s + a_0)}.$$

Since, $\mathcal{L}[y] = \mathcal{L}[y_h] + \mathcal{L}[y_\delta] \mathcal{L}[g(t)]$, so $y(t) = y_h(t) + (y_\delta * g)(t)$.

Solution decomposition theorem.

Proof: Compute: $\mathcal{L}[y''] + a_1 \mathcal{L}[y'] + a_0 \mathcal{L}[y] = \mathcal{L}[g(t)]$, and recall,

$$\mathcal{L}[y''] = s^2 \mathcal{L}[y] - sy_0 - y_1, \quad \mathcal{L}[y'] = s \mathcal{L}[y] - y_0.$$

$$(s^2 + a_1 s + a_0) \mathcal{L}[y] - sy_0 - y_1 - a_1 y_0 = \mathcal{L}[g(t)].$$

$$\mathcal{L}[y] = \frac{(s + a_1)y_0 + y_1}{(s^2 + a_1 s + a_0)} + \frac{1}{(s^2 + a_1 s + a_0)} \mathcal{L}[g(t)].$$

$$\text{Recall: } \mathcal{L}[y_h] = \frac{(s + a_1)y_0 + y_1}{(s^2 + a_1 s + a_0)}, \quad \text{and} \quad \mathcal{L}[y_\delta] = \frac{1}{(s^2 + a_1 s + a_0)}.$$

Since, $\mathcal{L}[y] = \mathcal{L}[y_h] + \mathcal{L}[y_\delta] \mathcal{L}[g(t)]$, so $y(t) = y_h(t) + (y_\delta * g)(t)$.

Equivalently: $y(t) = y_h(t) + \int_0^t y_\delta(\tau)g(t - \tau) d\tau.$ □

Systems of linear differential equations (Sect. 7.1).

- ▶ $n \times n$ systems of linear differential equations.
- ▶ Second order equations and first order systems.
- ▶ Main concepts from Linear Algebra.

$n \times n$ systems of linear differential equations.

Remark: Many physical systems must be described with more than one differential equation.

$n \times n$ systems of linear differential equations.

Remark: Many physical systems must be described with more than one differential equation.

Example

Newton's law of motion for a particle of mass m moving in space.

$n \times n$ systems of linear differential equations.

Remark: Many physical systems must be described with more than one differential equation.

Example

Newton's law of motion for a particle of mass m moving in space. The unknown and the force are vector-valued functions,

$n \times n$ systems of linear differential equations.

Remark: Many physical systems must be described with more than one differential equation.

Example

Newton's law of motion for a particle of mass m moving in space. The unknown and the force are vector-valued functions,

$$\mathbf{x}(t) = \begin{bmatrix} x_1(t) \\ x_2(t) \\ x_3(t) \end{bmatrix},$$

$n \times n$ systems of linear differential equations.

Remark: Many physical systems must be described with more than one differential equation.

Example

Newton's law of motion for a particle of mass m moving in space. The unknown and the force are vector-valued functions,

$$\mathbf{x}(t) = \begin{bmatrix} x_1(t) \\ x_2(t) \\ x_3(t) \end{bmatrix}, \quad \mathbf{F}(t) = \begin{bmatrix} F_1(t, \mathbf{x}) \\ F_2(t, \mathbf{x}) \\ F_3(t, \mathbf{x}) \end{bmatrix}.$$

$n \times n$ systems of linear differential equations.

Remark: Many physical systems must be described with more than one differential equation.

Example

Newton's law of motion for a particle of mass m moving in space. The unknown and the force are vector-valued functions,

$$\mathbf{x}(t) = \begin{bmatrix} x_1(t) \\ x_2(t) \\ x_3(t) \end{bmatrix}, \quad \mathbf{F}(t) = \begin{bmatrix} F_1(t, \mathbf{x}) \\ F_2(t, \mathbf{x}) \\ F_3(t, \mathbf{x}) \end{bmatrix}.$$

The equation of motion are: $m \frac{d^2 \mathbf{x}}{dt^2} = \mathbf{F}(t, \mathbf{x}(t)).$

$n \times n$ systems of linear differential equations.

Remark: Many physical systems must be described with more than one differential equation.

Example

Newton's law of motion for a particle of mass m moving in space. The unknown and the force are vector-valued functions,

$$\mathbf{x}(t) = \begin{bmatrix} x_1(t) \\ x_2(t) \\ x_3(t) \end{bmatrix}, \quad \mathbf{F}(t) = \begin{bmatrix} F_1(t, \mathbf{x}) \\ F_2(t, \mathbf{x}) \\ F_3(t, \mathbf{x}) \end{bmatrix}.$$

The equation of motion are: $m \frac{d^2 \mathbf{x}}{dt^2} = \mathbf{F}(t, \mathbf{x}(t))$.

These are three differential equations,

$$m \frac{d^2 x_1}{dt^2} = F_1(t, \mathbf{x}(t)), \quad m \frac{d^2 x_2}{dt^2} = F_2(t, \mathbf{x}(t)), \quad m \frac{d^2 x_3}{dt^2} = F_3(t, \mathbf{x}(t)).$$



$n \times n$ systems of linear differential equations.

Definition

An $n \times n$ *system of linear first order differential equations* is the following: Given the functions $a_{ij}, g_i : [a, b] \rightarrow \mathbb{R}$, where $i, j = 1, \dots, n$, find n functions $x_j : [a, b] \rightarrow \mathbb{R}$ solutions of the n linear differential equations

$$\begin{aligned}x_1' &= a_{11}(t)x_1 + \cdots + a_{1n}(t)x_n + g_1(t) \\&\vdots \\x_n' &= a_{n1}(t)x_1 + \cdots + a_{nn}(t)x_n + g_n(t).\end{aligned}$$

The system is called *homogeneous* iff the source functions satisfy that $g_1 = \cdots = g_n = 0$.

$n \times n$ systems of linear differential equations.

Example

$n = 1$: Single differential equation: Find $x_1(t)$ solution of

$$x_1' = a_{11}(t) x_1 + g_1(t).$$

$n \times n$ systems of linear differential equations.

Example

$n = 1$: Single differential equation: Find $x_1(t)$ solution of

$$x_1' = a_{11}(t) x_1 + g_1(t).$$

Example

$n = 2$: 2×2 linear system: Find $x_1(t)$ and $x_2(t)$ solutions of

$$x_1' = a_{11}(t) x_1 + a_{12}(t) x_2 + g_1(t),$$

$$x_2' = a_{21}(t) x_1 + a_{22}(t) x_2 + g_2(t).$$

$n \times n$ systems of linear differential equations.

Example

$n = 1$: Single differential equation: Find $x_1(t)$ solution of

$$x_1' = a_{11}(t) x_1 + g_1(t).$$

Example

$n = 2$: 2×2 linear system: Find $x_1(t)$ and $x_2(t)$ solutions of

$$x_1' = a_{11}(t) x_1 + a_{12}(t) x_2 + g_1(t),$$

$$x_2' = a_{21}(t) x_1 + a_{22}(t) x_2 + g_2(t).$$

Example

$n = 2$: 2×2 homogeneous linear system: Find $x_1(t)$ and $x_2(t)$,

$$x_1' = a_{11}(t) x_1 + a_{12}(t) x_2$$

$$x_2' = a_{21}(t) x_1 + a_{22}(t) x_2.$$

$n \times n$ systems of linear differential equations.

Example

Find $x_1(t)$, $x_2(t)$ solutions of the 2×2 ,
constant coefficients, homogeneous system

$$x_1' = x_1 - x_2,$$

$$x_2' = -x_1 + x_2.$$

$n \times n$ systems of linear differential equations.

Example

Find $x_1(t)$, $x_2(t)$ solutions of the 2×2 ,
constant coefficients, homogeneous system

$$x_1' = x_1 - x_2,$$

$$x_2' = -x_1 + x_2.$$

Solution: Add up the equations, and subtract the equations,

$n \times n$ systems of linear differential equations.

Example

Find $x_1(t)$, $x_2(t)$ solutions of the 2×2 ,
constant coefficients, homogeneous system

$$x_1' = x_1 - x_2,$$

$$x_2' = -x_1 + x_2.$$

Solution: Add up the equations, and subtract the equations,

$$(x_1 + x_2)' = 0,$$

$n \times n$ systems of linear differential equations.

Example

Find $x_1(t)$, $x_2(t)$ solutions of the 2×2 ,
constant coefficients, homogeneous system

$$x_1' = x_1 - x_2,$$

$$x_2' = -x_1 + x_2.$$

Solution: Add up the equations, and subtract the equations,

$$(x_1 + x_2)' = 0, \quad (x_1 - x_2)' = 2(x_1 - x_2).$$

$n \times n$ systems of linear differential equations.

Example

Find $x_1(t)$, $x_2(t)$ solutions of the 2×2 ,
constant coefficients, homogeneous system

$$x_1' = x_1 - x_2,$$

$$x_2' = -x_1 + x_2.$$

Solution: Add up the equations, and subtract the equations,

$$(x_1 + x_2)' = 0, \quad (x_1 - x_2)' = 2(x_1 - x_2).$$

Introduce the unknowns $v = x_1 + x_2$,

$n \times n$ systems of linear differential equations.

Example

Find $x_1(t)$, $x_2(t)$ solutions of the 2×2 ,
constant coefficients, homogeneous system

$$x_1' = x_1 - x_2,$$

$$x_2' = -x_1 + x_2.$$

Solution: Add up the equations, and subtract the equations,

$$(x_1 + x_2)' = 0, \quad (x_1 - x_2)' = 2(x_1 - x_2).$$

Introduce the unknowns $v = x_1 + x_2$, $w = x_1 - x_2$,

$n \times n$ systems of linear differential equations.

Example

Find $x_1(t)$, $x_2(t)$ solutions of the 2×2 ,
constant coefficients, homogeneous system

$$x_1' = x_1 - x_2,$$

$$x_2' = -x_1 + x_2.$$

Solution: Add up the equations, and subtract the equations,

$$(x_1 + x_2)' = 0, \quad (x_1 - x_2)' = 2(x_1 - x_2).$$

Introduce the unknowns $v = x_1 + x_2$, $w = x_1 - x_2$, then

$$v' = 0$$

$n \times n$ systems of linear differential equations.

Example

Find $x_1(t)$, $x_2(t)$ solutions of the 2×2 ,
constant coefficients, homogeneous system

$$x_1' = x_1 - x_2,$$

$$x_2' = -x_1 + x_2.$$

Solution: Add up the equations, and subtract the equations,

$$(x_1 + x_2)' = 0, \quad (x_1 - x_2)' = 2(x_1 - x_2).$$

Introduce the unknowns $v = x_1 + x_2$, $w = x_1 - x_2$, then

$$v' = 0 \quad \Rightarrow \quad v = c_1,$$

$n \times n$ systems of linear differential equations.

Example

Find $x_1(t)$, $x_2(t)$ solutions of the 2×2 ,
constant coefficients, homogeneous system

$$x_1' = x_1 - x_2,$$

$$x_2' = -x_1 + x_2.$$

Solution: Add up the equations, and subtract the equations,

$$(x_1 + x_2)' = 0, \quad (x_1 - x_2)' = 2(x_1 - x_2).$$

Introduce the unknowns $v = x_1 + x_2$, $w = x_1 - x_2$, then

$$v' = 0 \quad \Rightarrow \quad v = c_1,$$

$$w' = 2w$$

$n \times n$ systems of linear differential equations.

Example

Find $x_1(t)$, $x_2(t)$ solutions of the 2×2 ,
constant coefficients, homogeneous system

$$x_1' = x_1 - x_2,$$

$$x_2' = -x_1 + x_2.$$

Solution: Add up the equations, and subtract the equations,

$$(x_1 + x_2)' = 0, \quad (x_1 - x_2)' = 2(x_1 - x_2).$$

Introduce the unknowns $v = x_1 + x_2$, $w = x_1 - x_2$, then

$$v' = 0 \quad \Rightarrow \quad v = c_1,$$

$$w' = 2w \quad \Rightarrow \quad w = c_2 e^{2t}.$$

$n \times n$ systems of linear differential equations.

Example

Find $x_1(t)$, $x_2(t)$ solutions of the 2×2 ,
constant coefficients, homogeneous system

$$x_1' = x_1 - x_2,$$

$$x_2' = -x_1 + x_2.$$

Solution: Add up the equations, and subtract the equations,

$$(x_1 + x_2)' = 0, \quad (x_1 - x_2)' = 2(x_1 - x_2).$$

Introduce the unknowns $v = x_1 + x_2$, $w = x_1 - x_2$, then

$$v' = 0 \quad \Rightarrow \quad v = c_1,$$

$$w' = 2w \quad \Rightarrow \quad w = c_2 e^{2t}.$$

Back to x_1 and x_2 :

$n \times n$ systems of linear differential equations.

Example

Find $x_1(t)$, $x_2(t)$ solutions of the 2×2 ,
constant coefficients, homogeneous system

$$x_1' = x_1 - x_2,$$

$$x_2' = -x_1 + x_2.$$

Solution: Add up the equations, and subtract the equations,

$$(x_1 + x_2)' = 0, \quad (x_1 - x_2)' = 2(x_1 - x_2).$$

Introduce the unknowns $v = x_1 + x_2$, $w = x_1 - x_2$, then

$$v' = 0 \quad \Rightarrow \quad v = c_1,$$

$$w' = 2w \quad \Rightarrow \quad w = c_2 e^{2t}.$$

Back to x_1 and x_2 :

$$x_1 = \frac{1}{2}(v + w),$$

$n \times n$ systems of linear differential equations.

Example

Find $x_1(t)$, $x_2(t)$ solutions of the 2×2 ,
constant coefficients, homogeneous system

$$x_1' = x_1 - x_2,$$

$$x_2' = -x_1 + x_2.$$

Solution: Add up the equations, and subtract the equations,

$$(x_1 + x_2)' = 0, \quad (x_1 - x_2)' = 2(x_1 - x_2).$$

Introduce the unknowns $v = x_1 + x_2$, $w = x_1 - x_2$, then

$$v' = 0 \quad \Rightarrow \quad v = c_1,$$

$$w' = 2w \quad \Rightarrow \quad w = c_2 e^{2t}.$$

Back to x_1 and x_2 :

$$x_1 = \frac{1}{2}(v + w), \quad x_2 = \frac{1}{2}(v - w).$$

$n \times n$ systems of linear differential equations.

Example

Find $x_1(t)$, $x_2(t)$ solutions of the 2×2 ,
constant coefficients, homogeneous system

$$x_1' = x_1 - x_2,$$

$$x_2' = -x_1 + x_2.$$

Solution: Add up the equations, and subtract the equations,

$$(x_1 + x_2)' = 0, \quad (x_1 - x_2)' = 2(x_1 - x_2).$$

Introduce the unknowns $v = x_1 + x_2$, $w = x_1 - x_2$, then

$$v' = 0 \quad \Rightarrow \quad v = c_1,$$

$$w' = 2w \quad \Rightarrow \quad w = c_2 e^{2t}.$$

Back to x_1 and x_2 :
$$x_1 = \frac{1}{2}(v + w), \quad x_2 = \frac{1}{2}(v - w).$$

We conclude:
$$x_1(t) = \frac{1}{2}(c_1 + c_2 e^{2t}), \quad x_2(t) = \frac{1}{2}(c_1 - c_2 e^{2t}).$$



Systems of linear differential equations (Sect. 7.1).

- ▶ $n \times n$ systems of linear differential equations.
- ▶ **Second order equations and first order systems.**
- ▶ Main concepts from Linear Algebra.

Second order equations and first order systems.

Theorem (Reduction to first order)

Every solution y to the second order linear equation

$$y'' + p(t)y' + q(t)y = g(t), \quad (1)$$

defines a solution $x_1 = y$ and $x_2 = y'$ of the 2×2 first order linear differential system

$$x_1' = x_2, \quad (2)$$

$$x_2' = -q(t)x_1 - p(t)x_2 + g(t). \quad (3)$$

Conversely, every solution x_1, x_2 of the 2×2 first order linear system in Eqs. (2)-(3) defines a solution $y = x_1$ of the second order differential equation in (1).

Second order equations and first order systems.

Proof:

(\Rightarrow) Given y solution of $y'' + p(t)y' + q(t)y = g(t)$,

Second order equations and first order systems.

Proof:

(\Rightarrow) Given y solution of $y'' + p(t)y' + q(t)y = g(t)$,

introduce $x_1 = y$ and $x_2 = y'$,

Second order equations and first order systems.

Proof:

(\Rightarrow) Given y solution of $y'' + p(t)y' + q(t)y = g(t)$,

introduce $x_1 = y$ and $x_2 = y'$, hence $x_1' = y' = x_2$,

Second order equations and first order systems.

Proof:

(\Rightarrow) Given y solution of $y'' + p(t)y' + q(t)y = g(t)$,

introduce $x_1 = y$ and $x_2 = y'$, hence $x_1' = y' = x_2$, that is,

$$x_1' = x_2.$$

Second order equations and first order systems.

Proof:

(\Rightarrow) Given y solution of $y'' + p(t)y' + q(t)y = g(t)$,
introduce $x_1 = y$ and $x_2 = y'$, hence $x_1' = y' = x_2$, that is,

$$x_1' = x_2.$$

Then, $x_2' = y''$

Second order equations and first order systems.

Proof:

(\Rightarrow) Given y solution of $y'' + p(t)y' + q(t)y = g(t)$,
introduce $x_1 = y$ and $x_2 = y'$, hence $x_1' = y' = x_2$, that is,

$$x_1' = x_2.$$

Then, $x_2' = y'' = -q(t)y - p(t)y' + g(t)$.

Second order equations and first order systems.

Proof:

(\Rightarrow) Given y solution of $y'' + p(t)y' + q(t)y = g(t)$,
introduce $x_1 = y$ and $x_2 = y'$, hence $x_1' = y' = x_2$, that is,

$$x_1' = x_2.$$

Then, $x_2' = y'' = -q(t)y - p(t)y' + g(t)$. That is,

$$x_2' = -q(t)x_1 - p(t)x_2 + g(t).$$

Second order equations and first order systems.

Proof:

(\Rightarrow) Given y solution of $y'' + p(t)y' + q(t)y = g(t)$,
introduce $x_1 = y$ and $x_2 = y'$, hence $x_1' = y' = x_2$, that is,

$$x_1' = x_2.$$

Then, $x_2' = y'' = -q(t)y - p(t)y' + g(t)$. That is,

$$x_2' = -q(t)x_1 - p(t)x_2 + g(t).$$

(\Leftarrow) Introduce $x_2 = x_1'$ into $x_2' = -q(t)x_1 - p(t)x_2 + g(t)$.

Second order equations and first order systems.

Proof:

(\Rightarrow) Given y solution of $y'' + p(t)y' + q(t)y = g(t)$,
introduce $x_1 = y$ and $x_2 = y'$, hence $x_1' = y' = x_2$, that is,

$$x_1' = x_2.$$

Then, $x_2' = y'' = -q(t)y - p(t)y' + g(t)$. That is,

$$x_2' = -q(t)x_1 - p(t)x_2 + g(t).$$

(\Leftarrow) Introduce $x_2 = x_1'$ into $x_2' = -q(t)x_1 - p(t)x_2 + g(t)$.

$$x_1'' = -q(t)x_1 - p(t)x_1' + g(t),$$

Second order equations and first order systems.

Proof:

(\Rightarrow) Given y solution of $y'' + p(t)y' + q(t)y = g(t)$,
introduce $x_1 = y$ and $x_2 = y'$, hence $x_1' = y' = x_2$, that is,

$$x_1' = x_2.$$

Then, $x_2' = y'' = -q(t)y - p(t)y' + g(t)$. That is,

$$x_2' = -q(t)x_1 - p(t)x_2 + g(t).$$

(\Leftarrow) Introduce $x_2 = x_1'$ into $x_2' = -q(t)x_1 - p(t)x_2 + g(t)$.

$$x_1'' = -q(t)x_1 - p(t)x_1' + g(t),$$

that is

$$x_1'' + p(t)x_1' + q(t)x_1 = g(t).$$



Second order equations and first order systems.

Example

Express as a first order system the equation

$$y'' + 2y' + 2y = \sin(at).$$

Second order equations and first order systems.

Example

Express as a first order system the equation

$$y'' + 2y' + 2y = \sin(at).$$

Solution: Introduce the new unknowns

$$x_1 = y, \quad x_2 = y'$$

Second order equations and first order systems.

Example

Express as a first order system the equation

$$y'' + 2y' + 2y = \sin(at).$$

Solution: Introduce the new unknowns

$$x_1 = y, \quad x_2 = y' \quad \Rightarrow \quad x_1' = x_2.$$

Second order equations and first order systems.

Example

Express as a first order system the equation

$$y'' + 2y' + 2y = \sin(at).$$

Solution: Introduce the new unknowns

$$x_1 = y, \quad x_2 = y' \quad \Rightarrow \quad x_1' = x_2.$$

Then, the differential equation can be written as

$$x_2' + 2x_2 + 2x_1 = \sin(at).$$

Second order equations and first order systems.

Example

Express as a first order system the equation

$$y'' + 2y' + 2y = \sin(at).$$

Solution: Introduce the new unknowns

$$x_1 = y, \quad x_2 = y' \quad \Rightarrow \quad x_1' = x_2.$$

Then, the differential equation can be written as

$$x_2' + 2x_2 + 2x_1 = \sin(at).$$

We conclude that

$$x_1' = x_2.$$

$$x_2' = -2x_1 - 2x_2 + \sin(at).$$



Second order equations and first order systems.

Remark: Systems of first order equations can, sometimes, be transformed into a second order single equation.

Second order equations and first order systems.

Remark: Systems of first order equations can, sometimes, be transformed into a second order single equation.

Example

Express as a single second order equation
the 2×2 system and solve it,

$$x_1' = -x_1 + 3x_2,$$

$$x_2' = x_1 - x_2.$$

Second order equations and first order systems.

Remark: Systems of first order equations can, sometimes, be transformed into a second order single equation.

Example

Express as a single second order equation
the 2×2 system and solve it,

$$x_1' = -x_1 + 3x_2,$$

$$x_2' = x_1 - x_2.$$

Solution: Compute x_1 from the second equation:

Second order equations and first order systems.

Remark: Systems of first order equations can, sometimes, be transformed into a second order single equation.

Example

Express as a single second order equation
the 2×2 system and solve it,

$$x_1' = -x_1 + 3x_2,$$

$$x_2' = x_1 - x_2.$$

Solution: Compute x_1 from the second equation: $x_1 = x_2' + x_2$.

Second order equations and first order systems.

Remark: Systems of first order equations can, sometimes, be transformed into a second order single equation.

Example

Express as a single second order equation
the 2×2 system and solve it,

$$x_1' = -x_1 + 3x_2,$$

$$x_2' = x_1 - x_2.$$

Solution: Compute x_1 from the second equation:
Introduce this expression into the first equation,

$$x_1 = x_2' + x_2.$$

Second order equations and first order systems.

Remark: Systems of first order equations can, sometimes, be transformed into a second order single equation.

Example

Express as a single second order equation the 2×2 system and solve it,

$$x_1' = -x_1 + 3x_2,$$

$$x_2' = x_1 - x_2.$$

Solution: Compute x_1 from the second equation: $x_1 = x_2' + x_2$.
Introduce this expression into the first equation,

$$(x_2' + x_2)' = -(x_2' + x_2) + 3x_2,$$

Second order equations and first order systems.

Remark: Systems of first order equations can, sometimes, be transformed into a second order single equation.

Example

Express as a single second order equation
the 2×2 system and solve it,

$$x_1' = -x_1 + 3x_2,$$

$$x_2' = x_1 - x_2.$$

Solution: Compute x_1 from the second equation:
Introduce this expression into the first equation,

$$(x_2' + x_2)' = -(x_2' + x_2) + 3x_2,$$

$$x_2'' + x_2' = -x_2' - x_2 + 3x_2,$$

Second order equations and first order systems.

Remark: Systems of first order equations can, sometimes, be transformed into a second order single equation.

Example

Express as a single second order equation the 2×2 system and solve it,

$$x_1' = -x_1 + 3x_2,$$

$$x_2' = x_1 - x_2.$$

Solution: Compute x_1 from the second equation: $x_1 = x_2' + x_2$.
Introduce this expression into the first equation,

$$(x_2' + x_2)' = -(x_2' + x_2) + 3x_2,$$

$$x_2'' + x_2' = -x_2' - x_2 + 3x_2,$$

$$x_2'' + 2x_2' - 2x_2 = 0.$$

Second order equations and first order systems.

Example

Express as a single second order equation the 2×2 system and solve it,

$$x_1' = -x_1 + 3x_2,$$

$$x_2' = x_1 - x_2.$$

Solution: Recall: $x_2'' + 2x_2' - 2x_2 = 0$.

Second order equations and first order systems.

Example

Express as a single second order equation the 2×2 system and solve it,

$$x_1' = -x_1 + 3x_2,$$

$$x_2' = x_1 - x_2.$$

Solution: Recall: $x_2'' + 2x_2' - 2x_2 = 0$.

$$r^2 + 2r - 2 = 0$$

Second order equations and first order systems.

Example

Express as a single second order equation
the 2×2 system and solve it,

$$x_1' = -x_1 + 3x_2,$$

$$x_2' = x_1 - x_2.$$

Solution: Recall: $x_2'' + 2x_2' - 2x_2 = 0$.

$$r^2 + 2r - 2 = 0 \quad \Rightarrow \quad r_{\pm} = \frac{1}{2} [-2 \pm \sqrt{4 + 8}]$$

Second order equations and first order systems.

Example

Express as a single second order equation
the 2×2 system and solve it,

$$x_1' = -x_1 + 3x_2,$$

$$x_2' = x_1 - x_2.$$

Solution: Recall: $x_2'' + 2x_2' - 2x_2 = 0$.

$$r^2 + 2r - 2 = 0 \quad \Rightarrow \quad r_{\pm} = \frac{1}{2} [-2 \pm \sqrt{4 + 8}] \quad \Rightarrow \quad r_{\pm} = -1 \pm \sqrt{3}.$$

Second order equations and first order systems.

Example

Express as a single second order equation the 2×2 system and solve it,

$$x_1' = -x_1 + 3x_2,$$

$$x_2' = x_1 - x_2.$$

Solution: Recall: $x_2'' + 2x_2' - 2x_2 = 0$.

$$r^2 + 2r - 2 = 0 \quad \Rightarrow \quad r_{\pm} = \frac{1}{2} [-2 \pm \sqrt{4 + 8}] \quad \Rightarrow \quad r_{\pm} = -1 \pm \sqrt{3}.$$

Therefore, $x_2 = c_1 e^{r_+ t} + c_2 e^{r_- t}$.

Second order equations and first order systems.

Example

Express as a single second order equation
the 2×2 system and solve it,

$$x_1' = -x_1 + 3x_2,$$

$$x_2' = x_1 - x_2.$$

Solution: Recall: $x_2'' + 2x_2' - 2x_2 = 0$.

$$r^2 + 2r - 2 = 0 \quad \Rightarrow \quad r_{\pm} = \frac{1}{2} [-2 \pm \sqrt{4 + 8}] \quad \Rightarrow \quad r_{\pm} = -1 \pm \sqrt{3}.$$

Therefore, $x_2 = c_1 e^{r_+ t} + c_2 e^{r_- t}$. Since $x_1 = x_2' + x_2$,

Second order equations and first order systems.

Example

Express as a single second order equation
the 2×2 system and solve it,

$$x_1' = -x_1 + 3x_2,$$

$$x_2' = x_1 - x_2.$$

Solution: Recall: $x_2'' + 2x_2' - 2x_2 = 0$.

$$r^2 + 2r - 2 = 0 \quad \Rightarrow \quad r_{\pm} = \frac{1}{2} [-2 \pm \sqrt{4 + 8}] \quad \Rightarrow \quad r_{\pm} = -1 \pm \sqrt{3}.$$

Therefore, $x_2 = c_1 e^{r_+ t} + c_2 e^{r_- t}$. Since $x_1 = x_2' + x_2$,

$$x_1 = (c_1 r_+ e^{r_+ t} + c_2 r_- e^{r_- t}) + (c_1 e^{r_+ t} + c_2 e^{r_- t}),$$

Second order equations and first order systems.

Example

Express as a single second order equation
the 2×2 system and solve it,

$$x_1' = -x_1 + 3x_2,$$

$$x_2' = x_1 - x_2.$$

Solution: Recall: $x_2'' + 2x_2' - 2x_2 = 0$.

$$r^2 + 2r - 2 = 0 \quad \Rightarrow \quad r_{\pm} = \frac{1}{2} [-2 \pm \sqrt{4 + 8}] \quad \Rightarrow \quad r_{\pm} = -1 \pm \sqrt{3}.$$

Therefore, $x_2 = c_1 e^{r_+ t} + c_2 e^{r_- t}$. Since $x_1 = x_2' + x_2$,

$$x_1 = (c_1 r_+ e^{r_+ t} + c_2 r_- e^{r_- t}) + (c_1 e^{r_+ t} + c_2 e^{r_- t}),$$

We conclude: $x_1 = c_1 (1 + r_+) e^{r_+ t} + c_2 (1 + r_-) e^{r_- t}$.



Systems of linear differential equations (Sect. 7.1).

- ▶ $n \times n$ systems of linear differential equations.
- ▶ Second order equations and first order systems.
- ▶ **Main concepts from Linear Algebra.**

Main concepts from Linear Algebra.

Remark: Ideas from Linear Algebra are useful to study systems of linear differential equations.

Main concepts from Linear Algebra.

Remark: Ideas from Linear Algebra are useful to study systems of linear differential equations.

We review:

- ▶ Matrices $m \times n$.
- ▶ Matrix operations.
- ▶ n -vectors, dot product.
- ▶ matrix-vector product.

Main concepts from Linear Algebra.

Remark: Ideas from Linear Algebra are useful to study systems of linear differential equations.

We review:

- ▶ Matrices $m \times n$.
- ▶ Matrix operations.
- ▶ n -vectors, dot product.
- ▶ matrix-vector product.

Definition

An $m \times n$ matrix, A , is an array of numbers

$$A = \begin{bmatrix} a_{11} & \cdots & a_{1n} \\ \vdots & & \vdots \\ a_{m1} & \cdots & a_{mn} \end{bmatrix}, \quad \begin{array}{l} m \text{ rows,} \\ n \text{ columns.} \end{array}$$

where $a_{ij} \in \mathbb{C}$ and $i = 1, \dots, m$, and $j = 1, \dots, n$. An $n \times n$ matrix is called a **square matrix**.

Main concepts from Linear Algebra.

Example

(a) 2×2 matrix: $A = \begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix}$.

Main concepts from Linear Algebra.

Example

(a) 2×2 matrix: $A = \begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix}$.

(b) 2×3 matrix: $A = \begin{bmatrix} 1 & 2 & 3 \\ 4 & 5 & 6 \end{bmatrix}$.

Main concepts from Linear Algebra.

Example

(a) 2×2 matrix: $A = \begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix}$.

(b) 2×3 matrix: $A = \begin{bmatrix} 1 & 2 & 3 \\ 4 & 5 & 6 \end{bmatrix}$.

(c) 3×2 matrix: $A = \begin{bmatrix} 1 & 2 \\ 3 & 4 \\ 5 & 6 \end{bmatrix}$.

Main concepts from Linear Algebra.

Example

(a) 2×2 matrix: $A = \begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix}$.

(b) 2×3 matrix: $A = \begin{bmatrix} 1 & 2 & 3 \\ 4 & 5 & 6 \end{bmatrix}$.

(c) 3×2 matrix: $A = \begin{bmatrix} 1 & 2 \\ 3 & 4 \\ 5 & 6 \end{bmatrix}$.

(d) 2×2 complex-valued matrix: $A = \begin{bmatrix} 1+i & 2-i \\ 3 & 4i \end{bmatrix}$.

Main concepts from Linear Algebra.

Example

(a) 2×2 matrix: $A = \begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix}$.

(b) 2×3 matrix: $A = \begin{bmatrix} 1 & 2 & 3 \\ 4 & 5 & 6 \end{bmatrix}$.

(c) 3×2 matrix: $A = \begin{bmatrix} 1 & 2 \\ 3 & 4 \\ 5 & 6 \end{bmatrix}$.

(d) 2×2 complex-valued matrix: $A = \begin{bmatrix} 1+i & 2-i \\ 3 & 4i \end{bmatrix}$.

(e) The coefficients of a linear system can be grouped in a matrix,

$$x_1' = -x_1 + 3x_2$$

$$x_2' = x_1 - x_2$$

Main concepts from Linear Algebra.

Example

(a) 2×2 matrix: $A = \begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix}$.

(b) 2×3 matrix: $A = \begin{bmatrix} 1 & 2 & 3 \\ 4 & 5 & 6 \end{bmatrix}$.

(c) 3×2 matrix: $A = \begin{bmatrix} 1 & 2 \\ 3 & 4 \\ 5 & 6 \end{bmatrix}$.

(d) 2×2 complex-valued matrix: $A = \begin{bmatrix} 1+i & 2-i \\ 3 & 4i \end{bmatrix}$.

(e) The coefficients of a linear system can be grouped in a matrix,

$$\left. \begin{aligned} x_1' &= -x_1 + 3x_2 \\ x_2' &= x_1 - x_2 \end{aligned} \right\} \Rightarrow A = \begin{bmatrix} -1 & 3 \\ 1 & -1 \end{bmatrix}.$$

Main concepts from Linear Algebra.

Remark: An $m \times 1$ matrix is called an m -vector.

Main concepts from Linear Algebra.

Remark: An $m \times 1$ matrix is called an m -vector.

Definition

An m -vector, \mathbf{v} , is the array of numbers $\mathbf{v} = \begin{bmatrix} v_1 \\ \vdots \\ v_m \end{bmatrix}$, where the vector components $v_i \in \mathbb{C}$, with $i = 1, \dots, m$.

Main concepts from Linear Algebra.

Remark: An $m \times 1$ matrix is called an m -vector.

Definition

An m -vector, \mathbf{v} , is the array of numbers $\mathbf{v} = \begin{bmatrix} v_1 \\ \vdots \\ v_m \end{bmatrix}$, where the vector components $v_i \in \mathbb{C}$, with $i = 1, \dots, m$.

Example

The unknowns of a 2×2 linear system can be grouped in a 2-vector,

Main concepts from Linear Algebra.

Remark: An $m \times 1$ matrix is called an m -vector.

Definition

An m -vector, \mathbf{v} , is the array of numbers $\mathbf{v} = \begin{bmatrix} v_1 \\ \vdots \\ v_m \end{bmatrix}$, where the vector components $v_i \in \mathbb{C}$, with $i = 1, \dots, m$.

Example

The unknowns of a 2×2 linear system can be grouped in a 2-vector, for example,

$$x_1' = -x_1 + 3x_2$$

$$x_2' = x_1 - x_2$$

Main concepts from Linear Algebra.

Remark: An $m \times 1$ matrix is called an m -vector.

Definition

An m -vector, \mathbf{v} , is the array of numbers $\mathbf{v} = \begin{bmatrix} v_1 \\ \vdots \\ v_m \end{bmatrix}$, where the vector components $v_i \in \mathbb{C}$, with $i = 1, \dots, m$.

Example

The unknowns of a 2×2 linear system can be grouped in a 2-vector, for example,

$$\left. \begin{aligned} x_1' &= -x_1 + 3x_2 \\ x_2' &= x_1 - x_2 \end{aligned} \right\} \Rightarrow \mathbf{x} = \begin{bmatrix} x_1 \\ x_2 \end{bmatrix}.$$

Main concepts from Linear Algebra.

Remark: We present only examples of *matrix operations*.

Main concepts from Linear Algebra.

Remark: We present only examples of *matrix operations*.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 2+i & -1+2i \\ 3i & 2 & 1 \end{bmatrix}$.

Main concepts from Linear Algebra.

Remark: We present only examples of *matrix operations*.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 2+i & -1+2i \\ 3i & 2 & 1 \end{bmatrix}$.

(a) *A*-transpose: Interchange rows with columns:

Main concepts from Linear Algebra.

Remark: We present only examples of *matrix operations*.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 2+i & -1+2i \\ 3i & 2 & 1 \end{bmatrix}$.

(a) *A*-transpose: Interchange rows with columns:

$$A^T = \begin{bmatrix} 1 & 3i \\ 2+i & 2 \\ -1+2i & 1 \end{bmatrix}.$$

Main concepts from Linear Algebra.

Remark: We present only examples of *matrix operations*.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 2+i & -1+2i \\ 3i & 2 & 1 \end{bmatrix}$.

(a) *A*-transpose: Interchange rows with columns:

$$A^T = \begin{bmatrix} 1 & 3i \\ 2+i & 2 \\ -1+2i & 1 \end{bmatrix}. \quad \text{Notice that: } (A^T)^T = A.$$

Main concepts from Linear Algebra.

Remark: We present only examples of *matrix operations*.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 2+i & -1+2i \\ 3i & 2 & 1 \end{bmatrix}$.

(a) *A-transpose*: Interchange rows with columns:

$$A^T = \begin{bmatrix} 1 & 3i \\ 2+i & 2 \\ -1+2i & 1 \end{bmatrix}. \quad \text{Notice that: } (A^T)^T = A.$$

(b) *A-conjugate*: Conjugate every matrix coefficient:

Main concepts from Linear Algebra.

Remark: We present only examples of *matrix operations*.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 2+i & -1+2i \\ 3i & 2 & 1 \end{bmatrix}$.

(a) *A-transpose*: Interchange rows with columns:

$$A^T = \begin{bmatrix} 1 & 3i \\ 2+i & 2 \\ -1+2i & 1 \end{bmatrix}. \quad \text{Notice that: } (A^T)^T = A.$$

(b) *A-conjugate*: Conjugate every matrix coefficient:

$$\overline{A} = \begin{bmatrix} 1 & 2-i & -1-2i \\ -3i & 2 & 1 \end{bmatrix}.$$

Main concepts from Linear Algebra.

Remark: We present only examples of *matrix operations*.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 2+i & -1+2i \\ 3i & 2 & 1 \end{bmatrix}$.

(a) *A-transpose*: Interchange rows with columns:

$$A^T = \begin{bmatrix} 1 & 3i \\ 2+i & 2 \\ -1+2i & 1 \end{bmatrix}. \quad \text{Notice that: } (A^T)^T = A.$$

(b) *A-conjugate*: Conjugate every matrix coefficient:

$$\overline{A} = \begin{bmatrix} 1 & 2-i & -1-2i \\ -3i & 2 & 1 \end{bmatrix}. \quad \text{Notice that: } \overline{(\overline{A})} = A.$$

Main concepts from Linear Algebra.

Remark: We present only examples of *matrix operations*.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 2+i & -1+2i \\ 3i & 2 & 1 \end{bmatrix}$.

(a) **A-transpose:** Interchange rows with columns:

$$A^T = \begin{bmatrix} 1 & 3i \\ 2+i & 2 \\ -1+2i & 1 \end{bmatrix}. \quad \text{Notice that: } (A^T)^T = A.$$

(b) **A-conjugate:** Conjugate every matrix coefficient:

$$\overline{A} = \begin{bmatrix} 1 & 2-i & -1-2i \\ -3i & 2 & 1 \end{bmatrix}. \quad \text{Notice that: } \overline{(\overline{A})} = A.$$

Matrix A is real iff $\overline{A} = A$.

Main concepts from Linear Algebra.

Remark: We present only examples of *matrix operations*.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 2+i & -1+2i \\ 3i & 2 & 1 \end{bmatrix}$.

(a) **A-transpose:** Interchange rows with columns:

$$A^T = \begin{bmatrix} 1 & 3i \\ 2+i & 2 \\ -1+2i & 1 \end{bmatrix}. \quad \text{Notice that: } (A^T)^T = A.$$

(b) **A-conjugate:** Conjugate every matrix coefficient:

$$\overline{A} = \begin{bmatrix} 1 & 2-i & -1-2i \\ -3i & 2 & 1 \end{bmatrix}. \quad \text{Notice that: } \overline{(\overline{A})} = A.$$

Matrix A is real iff $\overline{A} = A$. Matrix A is imaginary iff $\overline{A} = -A$.

Main concepts from Linear Algebra.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 2+i & -1+2i \\ 3i & 2 & 1 \end{bmatrix}$.

Main concepts from Linear Algebra.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 2+i & -1+2i \\ 3i & 2 & 1 \end{bmatrix}$.

(a) A -adjoint: Conjugate and transpose:

Main concepts from Linear Algebra.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 2+i & -1+2i \\ 3i & 2 & 1 \end{bmatrix}$.

(a) **A-adjoint:** Conjugate and transpose:

$$A^* = \begin{bmatrix} 1 & -3i \\ 2-i & 2 \\ -1-2i & 1 \end{bmatrix}.$$

Main concepts from Linear Algebra.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 2+i & -1+2i \\ 3i & 2 & 1 \end{bmatrix}$.

(a) A -adjoint: Conjugate and transpose:

$$A^* = \begin{bmatrix} 1 & -3i \\ 2-i & 2 \\ -1-2i & 1 \end{bmatrix}. \quad \text{Notice that: } (A^*)^* = A.$$

Main concepts from Linear Algebra.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 2+i & -1+2i \\ 3i & 2 & 1 \end{bmatrix}$.

(a) A -adjoint: Conjugate and transpose:

$$A^* = \begin{bmatrix} 1 & -3i \\ 2-i & 2 \\ -1-2i & 1 \end{bmatrix}. \quad \text{Notice that: } (A^*)^* = A.$$

(b) Addition of two $m \times n$ matrices is performed component-wise:

Main concepts from Linear Algebra.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 2+i & -1+2i \\ 3i & 2 & 1 \end{bmatrix}$.

(a) **A-adjoint:** Conjugate and transpose:

$$A^* = \begin{bmatrix} 1 & -3i \\ 2-i & 2 \\ -1-2i & 1 \end{bmatrix}. \quad \text{Notice that: } (A^*)^* = A.$$

(b) Addition of two $m \times n$ matrices is performed component-wise:

$$\begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix} + \begin{bmatrix} 2 & 3 \\ 5 & 1 \end{bmatrix}$$

Main concepts from Linear Algebra.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 2+i & -1+2i \\ 3i & 2 & 1 \end{bmatrix}$.

(a) **A-adjoint:** Conjugate and transpose:

$$A^* = \begin{bmatrix} 1 & -3i \\ 2-i & 2 \\ -1-2i & 1 \end{bmatrix}. \quad \text{Notice that: } (A^*)^* = A.$$

(b) Addition of two $m \times n$ matrices is performed component-wise:

$$\begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix} + \begin{bmatrix} 2 & 3 \\ 5 & 1 \end{bmatrix} = \begin{bmatrix} (1+2) & (2+3) \\ (3+5) & (4+1) \end{bmatrix}$$

Main concepts from Linear Algebra.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 2+i & -1+2i \\ 3i & 2 & 1 \end{bmatrix}$.

(a) **A-adjoint:** Conjugate and transpose:

$$A^* = \begin{bmatrix} 1 & -3i \\ 2-i & 2 \\ -1-2i & 1 \end{bmatrix}. \quad \text{Notice that: } (A^*)^* = A.$$

(b) Addition of two $m \times n$ matrices is performed component-wise:

$$\begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix} + \begin{bmatrix} 2 & 3 \\ 5 & 1 \end{bmatrix} = \begin{bmatrix} (1+2) & (2+3) \\ (3+5) & (4+1) \end{bmatrix} = \begin{bmatrix} 3 & 5 \\ 8 & 5 \end{bmatrix}.$$

Main concepts from Linear Algebra.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 2+i & -1+2i \\ 3i & 2 & 1 \end{bmatrix}$.

(a) **A-adjoint:** Conjugate and transpose:

$$A^* = \begin{bmatrix} 1 & -3i \\ 2-i & 2 \\ -1-2i & 1 \end{bmatrix}. \quad \text{Notice that: } (A^*)^* = A.$$

(b) Addition of two $m \times n$ matrices is performed component-wise:

$$\begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix} + \begin{bmatrix} 2 & 3 \\ 5 & 1 \end{bmatrix} = \begin{bmatrix} (1+2) & (2+3) \\ (3+5) & (4+1) \end{bmatrix} = \begin{bmatrix} 3 & 5 \\ 8 & 5 \end{bmatrix}.$$

The addition $\begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix} + \begin{bmatrix} 1 & 2 & 3 \\ 4 & 5 & 6 \end{bmatrix}$ is not defined.

Main concepts from Linear Algebra.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 3 & 5 \\ 2 & 4 & 6 \end{bmatrix}$.

Main concepts from Linear Algebra.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 3 & 5 \\ 2 & 4 & 6 \end{bmatrix}$.

- (a) Multiplication of a matrix by a number is performed component-wise:

Main concepts from Linear Algebra.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 3 & 5 \\ 2 & 4 & 6 \end{bmatrix}$.

(a) Multiplication of a matrix by a number is performed component-wise:

$$2A = 2 \begin{bmatrix} 1 & 3 & 5 \\ 2 & 4 & 6 \end{bmatrix}$$

Main concepts from Linear Algebra.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 3 & 5 \\ 2 & 4 & 6 \end{bmatrix}$.

(a) Multiplication of a matrix by a number is performed component-wise:

$$2A = 2 \begin{bmatrix} 1 & 3 & 5 \\ 2 & 4 & 6 \end{bmatrix} = \begin{bmatrix} 2 & 6 & 10 \\ 4 & 8 & 12 \end{bmatrix},$$

Main concepts from Linear Algebra.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 3 & 5 \\ 2 & 4 & 6 \end{bmatrix}$.

(a) Multiplication of a matrix by a number is performed component-wise:

$$2A = 2 \begin{bmatrix} 1 & 3 & 5 \\ 2 & 4 & 6 \end{bmatrix} = \begin{bmatrix} 2 & 6 & 10 \\ 4 & 8 & 12 \end{bmatrix}, \quad \begin{bmatrix} 8 & 12 \\ 16 & 20 \end{bmatrix}$$

Main concepts from Linear Algebra.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 3 & 5 \\ 2 & 4 & 6 \end{bmatrix}$.

(a) Multiplication of a matrix by a number is performed component-wise:

$$2A = 2 \begin{bmatrix} 1 & 3 & 5 \\ 2 & 4 & 6 \end{bmatrix} = \begin{bmatrix} 2 & 6 & 10 \\ 4 & 8 & 12 \end{bmatrix}, \quad \begin{bmatrix} 8 & 12 \\ 16 & 20 \end{bmatrix} = 4 \begin{bmatrix} 2 & 3 \\ 4 & 5 \end{bmatrix}.$$

Main concepts from Linear Algebra.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 3 & 5 \\ 2 & 4 & 6 \end{bmatrix}$.

(a) Multiplication of a matrix by a number is performed component-wise:

$$2A = 2 \begin{bmatrix} 1 & 3 & 5 \\ 2 & 4 & 6 \end{bmatrix} = \begin{bmatrix} 2 & 6 & 10 \\ 4 & 8 & 12 \end{bmatrix}, \quad \begin{bmatrix} 8 & 12 \\ 16 & 20 \end{bmatrix} = 4 \begin{bmatrix} 2 & 3 \\ 4 & 5 \end{bmatrix}.$$

Also:

$$\frac{A}{3}$$

Main concepts from Linear Algebra.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 3 & 5 \\ 2 & 4 & 6 \end{bmatrix}$.

(a) Multiplication of a matrix by a number is performed component-wise:

$$2A = 2 \begin{bmatrix} 1 & 3 & 5 \\ 2 & 4 & 6 \end{bmatrix} = \begin{bmatrix} 2 & 6 & 10 \\ 4 & 8 & 12 \end{bmatrix}, \quad \begin{bmatrix} 8 & 12 \\ 16 & 20 \end{bmatrix} = 4 \begin{bmatrix} 2 & 3 \\ 4 & 5 \end{bmatrix}.$$

Also:

$$\frac{A}{3} = \frac{1}{3} \begin{bmatrix} 1 & 3 & 5 \\ 2 & 4 & 6 \end{bmatrix}$$

Main concepts from Linear Algebra.

Example

Consider a 2×3 matrix $A = \begin{bmatrix} 1 & 3 & 5 \\ 2 & 4 & 6 \end{bmatrix}$.

(a) Multiplication of a matrix by a number is performed component-wise:

$$2A = 2 \begin{bmatrix} 1 & 3 & 5 \\ 2 & 4 & 6 \end{bmatrix} = \begin{bmatrix} 2 & 6 & 10 \\ 4 & 8 & 12 \end{bmatrix}, \quad \begin{bmatrix} 8 & 12 \\ 16 & 20 \end{bmatrix} = 4 \begin{bmatrix} 2 & 3 \\ 4 & 5 \end{bmatrix}.$$

Also:

$$\frac{A}{3} = \frac{1}{3} \begin{bmatrix} 1 & 3 & 5 \\ 2 & 4 & 6 \end{bmatrix} = \begin{bmatrix} \frac{1}{3} & 1 & \frac{5}{3} \\ \frac{2}{3} & \frac{4}{3} & 2 \end{bmatrix}.$$

Main concepts from Linear Algebra.

Example

(a) Matrix multiplication.

Main concepts from Linear Algebra.

Example

(a) **Matrix multiplication.** The matrix sizes is important:

Main concepts from Linear Algebra.

Example

(a) Matrix multiplication. The matrix sizes is important:

$$\begin{array}{ccccc} A & \text{times} & B & \text{defines} & AB \\ m \times n & & n \times \ell & & m \times \ell \end{array}$$

Main concepts from Linear Algebra.

Example

(a) **Matrix multiplication.** The matrix sizes is important:

$$\begin{array}{ccccc} A & \text{times} & B & \text{defines} & AB \\ m \times n & & n \times \ell & & m \times \ell \end{array}$$

Example: A is 2×2 , B is 2×3 , so AB is 2×3 :

Main concepts from Linear Algebra.

Example

(a) **Matrix multiplication.** The matrix sizes is important:

$$\begin{array}{ccccc} A & \text{times} & B & \text{defines} & AB \\ m \times n & & n \times \ell & & m \times \ell \end{array}$$

Example: A is 2×2 , B is 2×3 , so AB is 2×3 :

$$AB = \begin{bmatrix} 4 & 3 \\ 2 & 1 \end{bmatrix} \begin{bmatrix} 1 & 2 & 3 \\ 4 & 5 & 6 \end{bmatrix} = \begin{bmatrix} 16 & 23 & 30 \\ 6 & 9 & 12 \end{bmatrix}.$$

Main concepts from Linear Algebra.

Example

(a) **Matrix multiplication.** The matrix sizes is important:

$$\begin{array}{ccccc} A & \text{times} & B & \text{defines} & AB \\ m \times n & & n \times \ell & & m \times \ell \end{array}$$

Example: A is 2×2 , B is 2×3 , so AB is 2×3 :

$$AB = \begin{bmatrix} 4 & 3 \\ 2 & 1 \end{bmatrix} \begin{bmatrix} 1 & 2 & 3 \\ 4 & 5 & 6 \end{bmatrix} = \begin{bmatrix} 16 & 23 & 30 \\ 6 & 9 & 12 \end{bmatrix}.$$

Notice B is 2×3 , A is 2×2 , so BA is not defined.

Main concepts from Linear Algebra.

Example

(a) **Matrix multiplication.** The matrix sizes is important:

$$\begin{array}{ccccc} A & \text{times} & B & \text{defines} & AB \\ m \times n & & n \times \ell & & m \times \ell \end{array}$$

Example: A is 2×2 , B is 2×3 , so AB is 2×3 :

$$AB = \begin{bmatrix} 4 & 3 \\ 2 & 1 \end{bmatrix} \begin{bmatrix} 1 & 2 & 3 \\ 4 & 5 & 6 \end{bmatrix} = \begin{bmatrix} 16 & 23 & 30 \\ 6 & 9 & 12 \end{bmatrix}.$$

Notice B is 2×3 , A is 2×2 , so BA is not defined.

$$BA = \begin{bmatrix} 1 & 2 & 3 \\ 4 & 5 & 6 \end{bmatrix} \begin{bmatrix} 4 & 3 \\ 2 & 1 \end{bmatrix} \quad \text{not defined.}$$

Main concepts from Linear Algebra.

Remark: The matrix product is not commutative, that is, in general holds $AB \neq BA$.

Main concepts from Linear Algebra.

Remark: The matrix product is not commutative, that is, in general holds $AB \neq BA$.

Example

Find AB and BA for $A = \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix}$ and $B = \begin{bmatrix} 3 & 0 \\ 2 & -1 \end{bmatrix}$.

Main concepts from Linear Algebra.

Remark: The matrix product is not commutative, that is, in general holds $AB \neq BA$.

Example

Find AB and BA for $A = \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix}$ and $B = \begin{bmatrix} 3 & 0 \\ 2 & -1 \end{bmatrix}$.

Solution:

$$AB = \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix} \begin{bmatrix} 3 & 0 \\ 2 & -1 \end{bmatrix}$$

Main concepts from Linear Algebra.

Remark: The matrix product is not commutative, that is, in general holds $AB \neq BA$.

Example

Find AB and BA for $A = \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix}$ and $B = \begin{bmatrix} 3 & 0 \\ 2 & -1 \end{bmatrix}$.

Solution:

$$AB = \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix} \begin{bmatrix} 3 & 0 \\ 2 & -1 \end{bmatrix} = \begin{bmatrix} (6-2) & (0+1) \\ (-3+4) & (0-2) \end{bmatrix}$$

Main concepts from Linear Algebra.

Remark: The matrix product is not commutative, that is, in general holds $AB \neq BA$.

Example

Find AB and BA for $A = \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix}$ and $B = \begin{bmatrix} 3 & 0 \\ 2 & -1 \end{bmatrix}$.

Solution:

$$AB = \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix} \begin{bmatrix} 3 & 0 \\ 2 & -1 \end{bmatrix} = \begin{bmatrix} (6-2) & (0+1) \\ (-3+4) & (0-2) \end{bmatrix} = \begin{bmatrix} 4 & 1 \\ 1 & -2 \end{bmatrix}.$$

Main concepts from Linear Algebra.

Remark: The matrix product is not commutative, that is, in general holds $AB \neq BA$.

Example

Find AB and BA for $A = \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix}$ and $B = \begin{bmatrix} 3 & 0 \\ 2 & -1 \end{bmatrix}$.

Solution:

$$AB = \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix} \begin{bmatrix} 3 & 0 \\ 2 & -1 \end{bmatrix} = \begin{bmatrix} (6-2) & (0+1) \\ (-3+4) & (0-2) \end{bmatrix} = \begin{bmatrix} 4 & 1 \\ 1 & -2 \end{bmatrix}.$$

$$BA = \begin{bmatrix} 3 & 0 \\ 2 & -1 \end{bmatrix} \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix}$$

Main concepts from Linear Algebra.

Remark: The matrix product is not commutative, that is, in general holds $AB \neq BA$.

Example

Find AB and BA for $A = \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix}$ and $B = \begin{bmatrix} 3 & 0 \\ 2 & -1 \end{bmatrix}$.

Solution:

$$AB = \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix} \begin{bmatrix} 3 & 0 \\ 2 & -1 \end{bmatrix} = \begin{bmatrix} (6-2) & (0+1) \\ (-3+4) & (0-2) \end{bmatrix} = \begin{bmatrix} 4 & 1 \\ 1 & -2 \end{bmatrix}.$$

$$BA = \begin{bmatrix} 3 & 0 \\ 2 & -1 \end{bmatrix} \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix} = \begin{bmatrix} (6+0) & (-3+0) \\ (4+1) & (-2-2) \end{bmatrix}$$

Main concepts from Linear Algebra.

Remark: The matrix product is not commutative, that is, in general holds $AB \neq BA$.

Example

Find AB and BA for $A = \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix}$ and $B = \begin{bmatrix} 3 & 0 \\ 2 & -1 \end{bmatrix}$.

Solution:

$$AB = \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix} \begin{bmatrix} 3 & 0 \\ 2 & -1 \end{bmatrix} = \begin{bmatrix} (6-2) & (0+1) \\ (-3+4) & (0-2) \end{bmatrix} = \begin{bmatrix} 4 & 1 \\ 1 & -2 \end{bmatrix}.$$

$$BA = \begin{bmatrix} 3 & 0 \\ 2 & -1 \end{bmatrix} \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix} = \begin{bmatrix} (6+0) & (-3+0) \\ (4+1) & (-2-2) \end{bmatrix} = \begin{bmatrix} 6 & -3 \\ 5 & -4 \end{bmatrix}.$$

Main concepts from Linear Algebra.

Remark: The matrix product is not commutative, that is, in general holds $AB \neq BA$.

Example

Find AB and BA for $A = \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix}$ and $B = \begin{bmatrix} 3 & 0 \\ 2 & -1 \end{bmatrix}$.

Solution:

$$AB = \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix} \begin{bmatrix} 3 & 0 \\ 2 & -1 \end{bmatrix} = \begin{bmatrix} (6-2) & (0+1) \\ (-3+4) & (0-2) \end{bmatrix} = \begin{bmatrix} 4 & 1 \\ 1 & -2 \end{bmatrix}.$$

$$BA = \begin{bmatrix} 3 & 0 \\ 2 & -1 \end{bmatrix} \begin{bmatrix} 2 & -1 \\ -1 & 2 \end{bmatrix} = \begin{bmatrix} (6+0) & (-3+0) \\ (4+1) & (-2-2) \end{bmatrix} = \begin{bmatrix} 6 & -3 \\ 5 & -4 \end{bmatrix}.$$

So $AB \neq BA$.



Main concepts from Linear Algebra.

Remark: There exist matrices $A \neq 0$ and $B \neq 0$ with $AB = 0$.

Main concepts from Linear Algebra.

Remark: There exist matrices $A \neq 0$ and $B \neq 0$ with $AB = 0$.

Example

Find AB for $A = \begin{bmatrix} 1 & -1 \\ -1 & 1 \end{bmatrix}$ and $B = \begin{bmatrix} 1 & -1 \\ 1 & -1 \end{bmatrix}$.

Main concepts from Linear Algebra.

Remark: There exist matrices $A \neq 0$ and $B \neq 0$ with $AB = 0$.

Example

Find AB for $A = \begin{bmatrix} 1 & -1 \\ -1 & 1 \end{bmatrix}$ and $B = \begin{bmatrix} 1 & -1 \\ 1 & -1 \end{bmatrix}$.

Solution:

$$AB = \begin{bmatrix} 1 & -1 \\ -1 & 1 \end{bmatrix} \begin{bmatrix} 1 & -1 \\ 1 & -1 \end{bmatrix}$$

Main concepts from Linear Algebra.

Remark: There exist matrices $A \neq 0$ and $B \neq 0$ with $AB = 0$.

Example

Find AB for $A = \begin{bmatrix} 1 & -1 \\ -1 & 1 \end{bmatrix}$ and $B = \begin{bmatrix} 1 & -1 \\ 1 & -1 \end{bmatrix}$.

Solution:

$$AB = \begin{bmatrix} 1 & -1 \\ -1 & 1 \end{bmatrix} \begin{bmatrix} 1 & -1 \\ 1 & -1 \end{bmatrix} = \begin{bmatrix} (1-1) & (-1+1) \\ (-1+1) & (1-1) \end{bmatrix}$$

Main concepts from Linear Algebra.

Remark: There exist matrices $A \neq 0$ and $B \neq 0$ with $AB = 0$.

Example

Find AB for $A = \begin{bmatrix} 1 & -1 \\ -1 & 1 \end{bmatrix}$ and $B = \begin{bmatrix} 1 & -1 \\ 1 & -1 \end{bmatrix}$.

Solution:

$$AB = \begin{bmatrix} 1 & -1 \\ -1 & 1 \end{bmatrix} \begin{bmatrix} 1 & -1 \\ 1 & -1 \end{bmatrix} = \begin{bmatrix} (1-1) & (-1+1) \\ (-1+1) & (1-1) \end{bmatrix} = \begin{bmatrix} 0 & 0 \\ 0 & 0 \end{bmatrix}.$$



Main concepts from Linear Algebra.

Remark: There exist matrices $A \neq 0$ and $B \neq 0$ with $AB = 0$.

Example

Find AB for $A = \begin{bmatrix} 1 & -1 \\ -1 & 1 \end{bmatrix}$ and $B = \begin{bmatrix} 1 & -1 \\ 1 & -1 \end{bmatrix}$.

Solution:

$$AB = \begin{bmatrix} 1 & -1 \\ -1 & 1 \end{bmatrix} \begin{bmatrix} 1 & -1 \\ 1 & -1 \end{bmatrix} = \begin{bmatrix} (1-1) & (-1+1) \\ (-1+1) & (1-1) \end{bmatrix} = \begin{bmatrix} 0 & 0 \\ 0 & 0 \end{bmatrix}.$$



Recall: If $a, b \in \mathbb{R}$ and $ab = 0$, then either $a = 0$ or $b = 0$.

Main concepts from Linear Algebra.

Remark: There exist matrices $A \neq 0$ and $B \neq 0$ with $AB = 0$.

Example

Find AB for $A = \begin{bmatrix} 1 & -1 \\ -1 & 1 \end{bmatrix}$ and $B = \begin{bmatrix} 1 & -1 \\ 1 & -1 \end{bmatrix}$.

Solution:

$$AB = \begin{bmatrix} 1 & -1 \\ -1 & 1 \end{bmatrix} \begin{bmatrix} 1 & -1 \\ 1 & -1 \end{bmatrix} = \begin{bmatrix} (1-1) & (-1+1) \\ (-1+1) & (1-1) \end{bmatrix} = \begin{bmatrix} 0 & 0 \\ 0 & 0 \end{bmatrix}.$$



Recall: If $a, b \in \mathbb{R}$ and $ab = 0$, then either $a = 0$ or $b = 0$.

We have just shown that this statement is not true for matrices.

Review Exam 3.

- ▶ Sections 6.1-6.6.
- ▶ 5 or 6 problems.
- ▶ 50 minutes.
- ▶ Laplace Transform table included.

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Compute the LT of the equation,

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Compute the LT of the equation,

$$\mathcal{L}[y''] - 2\mathcal{L}[y'] + 2\mathcal{L}[y] = \mathcal{L}[\delta(t - 2)]$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Compute the LT of the equation,

$$\mathcal{L}[y''] - 2\mathcal{L}[y'] + 2\mathcal{L}[y] = \mathcal{L}[\delta(t - 2)] = e^{-2s}$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Compute the LT of the equation,

$$\mathcal{L}[y''] - 2\mathcal{L}[y'] + 2\mathcal{L}[y] = \mathcal{L}[\delta(t - 2)] = e^{-2s}$$

$$\mathcal{L}[y''] = s^2 \mathcal{L}[y] - s y(0) - y'(0),$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Compute the LT of the equation,

$$\mathcal{L}[y''] - 2\mathcal{L}[y'] + 2\mathcal{L}[y] = \mathcal{L}[\delta(t - 2)] = e^{-2s}$$

$$\mathcal{L}[y''] = s^2 \mathcal{L}[y] - s y(0) - y'(0), \quad \mathcal{L}[y'] = s \mathcal{L}[y] - y(0).$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Compute the LT of the equation,

$$\mathcal{L}[y''] - 2\mathcal{L}[y'] + 2\mathcal{L}[y] = \mathcal{L}[\delta(t - 2)] = e^{-2s}$$

$$\mathcal{L}[y''] = s^2 \mathcal{L}[y] - s y(0) - y'(0), \quad \mathcal{L}[y'] = s \mathcal{L}[y] - y(0).$$

$$(s^2 - 2s + 2) \mathcal{L}[y] - s y(0) - y'(0) + 2 y(0) = e^{-2s}$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Compute the LT of the equation,

$$\mathcal{L}[y''] - 2\mathcal{L}[y'] + 2\mathcal{L}[y] = \mathcal{L}[\delta(t - 2)] = e^{-2s}$$

$$\mathcal{L}[y''] = s^2 \mathcal{L}[y] - s y(0) - y'(0), \quad \mathcal{L}[y'] = s \mathcal{L}[y] - y(0).$$

$$(s^2 - 2s + 2) \mathcal{L}[y] - s y(0) - y'(0) + 2 y(0) = e^{-2s}$$

$$(s^2 - 2s + 2) \mathcal{L}[y] - s - 1 = e^{-2s}$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Compute the LT of the equation,

$$\mathcal{L}[y''] - 2\mathcal{L}[y'] + 2\mathcal{L}[y] = \mathcal{L}[\delta(t - 2)] = e^{-2s}$$

$$\mathcal{L}[y''] = s^2 \mathcal{L}[y] - s y(0) - y'(0), \quad \mathcal{L}[y'] = s \mathcal{L}[y] - y(0).$$

$$(s^2 - 2s + 2) \mathcal{L}[y] - s y(0) - y'(0) + 2 y(0) = e^{-2s}$$

$$(s^2 - 2s + 2) \mathcal{L}[y] - s - 1 = e^{-2s}$$

$$\mathcal{L}[y] = \frac{(s + 1)}{(s^2 - 2s + 2)} + \frac{1}{(s^2 - 2s + 2)} e^{-2s}.$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s+1)}{(s^2 - 2s + 2)} + \frac{1}{(s^2 - 2s + 2)} e^{-2s}.$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s+1)}{(s^2 - 2s + 2)} + \frac{1}{(s^2 - 2s + 2)} e^{-2s}.$

$$s^2 - 2s + 2 = 0$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s+1)}{(s^2 - 2s + 2)} + \frac{1}{(s^2 - 2s + 2)} e^{-2s}.$

$$s^2 - 2s + 2 = 0 \quad \Rightarrow \quad s_{\pm} = \frac{1}{2} [2 \pm \sqrt{4 - 8}],$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s+1)}{(s^2 - 2s + 2)} + \frac{1}{(s^2 - 2s + 2)} e^{-2s}.$

$$s^2 - 2s + 2 = 0 \quad \Rightarrow \quad s_{\pm} = \frac{1}{2} [2 \pm \sqrt{4 - 8}], \quad \text{complex roots.}$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s+1)}{(s^2 - 2s + 2)} + \frac{1}{(s^2 - 2s + 2)} e^{-2s}.$

$$s^2 - 2s + 2 = 0 \quad \Rightarrow \quad s_{\pm} = \frac{1}{2} [2 \pm \sqrt{4 - 8}], \quad \text{complex roots.}$$

$$s^2 - 2s + 2 = (s^2 - 2s + 1) - 1 + 2$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s+1)}{(s^2 - 2s + 2)} + \frac{1}{(s^2 - 2s + 2)} e^{-2s}.$

$$s^2 - 2s + 2 = 0 \quad \Rightarrow \quad s_{\pm} = \frac{1}{2} [2 \pm \sqrt{4 - 8}], \quad \text{complex roots.}$$

$$s^2 - 2s + 2 = (s^2 - 2s + 1) - 1 + 2 = (s - 1)^2 + 1.$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s+1)}{(s^2 - 2s + 2)} + \frac{1}{(s^2 - 2s + 2)} e^{-2s}.$

$$s^2 - 2s + 2 = 0 \quad \Rightarrow \quad s_{\pm} = \frac{1}{2} [2 \pm \sqrt{4 - 8}], \quad \text{complex roots.}$$

$$s^2 - 2s + 2 = (s^2 - 2s + 1) - 1 + 2 = (s - 1)^2 + 1.$$

$$\mathcal{L}[y] = \frac{s+1}{(s-1)^2 + 1} + \frac{1}{(s-1)^2 + 1} e^{-2s}$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s+1)}{(s^2 - 2s + 2)} + \frac{1}{(s^2 - 2s + 2)} e^{-2s}.$

$$s^2 - 2s + 2 = 0 \quad \Rightarrow \quad s_{\pm} = \frac{1}{2}[2 \pm \sqrt{4 - 8}], \quad \text{complex roots.}$$

$$s^2 - 2s + 2 = (s^2 - 2s + 1) - 1 + 2 = (s - 1)^2 + 1.$$

$$\mathcal{L}[y] = \frac{s+1}{(s-1)^2 + 1} + \frac{1}{(s-1)^2 + 1} e^{-2s}$$

$$\mathcal{L}[y] = \frac{(s-1+1)+1}{(s-1)^2 + 1} + \frac{1}{(s-1)^2 + 1} e^{-2s}$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s-1)+2}{(s-1)^2+1} + \frac{1}{(s-1)^2+1} e^{-2s},$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s-1)+2}{(s-1)^2+1} + \frac{1}{(s-1)^2+1} e^{-2s},$

$$\mathcal{L}[y] = \frac{(s-1)}{(s-1)^2+1} + 2 \frac{1}{(s-1)^2+1} + e^{-2s} \frac{1}{(s-1)^2+1},$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s-1)+2}{(s-1)^2+1} + \frac{1}{(s-1)^2+1} e^{-2s},$

$$\mathcal{L}[y] = \frac{(s-1)}{(s-1)^2+1} + 2 \frac{1}{(s-1)^2+1} + e^{-2s} \frac{1}{(s-1)^2+1},$$

$$\mathcal{L}[\cos(at)] = \frac{s}{s^2+a^2},$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s-1)+2}{(s-1)^2+1} + \frac{1}{(s-1)^2+1} e^{-2s},$

$$\mathcal{L}[y] = \frac{(s-1)}{(s-1)^2+1} + 2 \frac{1}{(s-1)^2+1} + e^{-2s} \frac{1}{(s-1)^2+1},$$

$$\mathcal{L}[\cos(at)] = \frac{s}{s^2+a^2}, \quad \mathcal{L}[\sin(at)] = \frac{a}{s^2+a^2},$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s-1)+2}{(s-1)^2+1} + \frac{1}{(s-1)^2+1} e^{-2s},$

$$\mathcal{L}[y] = \frac{(s-1)}{(s-1)^2+1} + 2 \frac{1}{(s-1)^2+1} + e^{-2s} \frac{1}{(s-1)^2+1},$$

$$\mathcal{L}[\cos(at)] = \frac{s}{s^2+a^2}, \quad \mathcal{L}[\sin(at)] = \frac{a}{s^2+a^2},$$

$$\mathcal{L}[y] = \mathcal{L}[\cos(t)]|_{(s-1)}$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s-1)+2}{(s-1)^2+1} + \frac{1}{(s-1)^2+1} e^{-2s},$

$$\mathcal{L}[y] = \frac{(s-1)}{(s-1)^2+1} + 2 \frac{1}{(s-1)^2+1} + e^{-2s} \frac{1}{(s-1)^2+1},$$

$$\mathcal{L}[\cos(at)] = \frac{s}{s^2+a^2}, \quad \mathcal{L}[\sin(at)] = \frac{a}{s^2+a^2},$$

$$\mathcal{L}[y] = \mathcal{L}[\cos(t)]|_{(s-1)} + 2 \mathcal{L}[\sin(t)]|_{(s-1)}$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall: $\mathcal{L}[y] = \frac{(s-1)+2}{(s-1)^2+1} + \frac{1}{(s-1)^2+1} e^{-2s},$

$$\mathcal{L}[y] = \frac{(s-1)}{(s-1)^2+1} + 2 \frac{1}{(s-1)^2+1} + e^{-2s} \frac{1}{(s-1)^2+1},$$

$$\mathcal{L}[\cos(at)] = \frac{s}{s^2+a^2}, \quad \mathcal{L}[\sin(at)] = \frac{a}{s^2+a^2},$$

$$\mathcal{L}[y] = \mathcal{L}[\cos(t)]|_{(s-1)} + 2 \mathcal{L}[\sin(t)]|_{(s-1)} + e^{-2s} \mathcal{L}[\sin(t)]|_{(s-1)}.$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall:

$$\mathcal{L}[y] = \mathcal{L}[\cos(t)]|_{(s-1)} + 2 \mathcal{L}[\sin(t)]|_{(s-1)} + e^{-2s} \mathcal{L}[\sin(t)]|_{(s-1)}$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall:

$$\mathcal{L}[y] = \mathcal{L}[\cos(t)]|_{(s-1)} + 2 \mathcal{L}[\sin(t)]|_{(s-1)} + e^{-2s} \mathcal{L}[\sin(t)]|_{(s-1)}$$

$$\text{and } \mathcal{L}[f(t)]|_{(s-c)} = \mathcal{L}[e^{ct} f(t)].$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall:

$$\mathcal{L}[y] = \mathcal{L}[\cos(t)]|_{(s-1)} + 2 \mathcal{L}[\sin(t)]|_{(s-1)} + e^{-2s} \mathcal{L}[\sin(t)]|_{(s-1)}$$

and $\mathcal{L}[f(t)]|_{(s-c)} = \mathcal{L}[e^{ct} f(t)]$. Therefore,

$$\mathcal{L}[y] = \mathcal{L}[e^t \cos(t)]$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall:

$$\mathcal{L}[y] = \mathcal{L}[\cos(t)]|_{(s-1)} + 2 \mathcal{L}[\sin(t)]|_{(s-1)} + e^{-2s} \mathcal{L}[\sin(t)]|_{(s-1)}$$

and $\mathcal{L}[f(t)]|_{(s-c)} = \mathcal{L}[e^{ct} f(t)]$. Therefore,

$$\mathcal{L}[y] = \mathcal{L}[e^t \cos(t)] + 2 \mathcal{L}[e^t \sin(t)]$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall:

$$\mathcal{L}[y] = \mathcal{L}[\cos(t)]|_{(s-1)} + 2 \mathcal{L}[\sin(t)]|_{(s-1)} + e^{-2s} \mathcal{L}[\sin(t)]|_{(s-1)}$$

and $\mathcal{L}[f(t)]|_{(s-c)} = \mathcal{L}[e^{ct} f(t)]$. Therefore,

$$\mathcal{L}[y] = \mathcal{L}[e^t \cos(t)] + 2 \mathcal{L}[e^t \sin(t)] + e^{-2s} \mathcal{L}[e^t \sin(t)].$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall:

$$\mathcal{L}[y] = \mathcal{L}[\cos(t)]|_{(s-1)} + 2 \mathcal{L}[\sin(t)]|_{(s-1)} + e^{-2s} \mathcal{L}[\sin(t)]|_{(s-1)}$$

and $\mathcal{L}[f(t)]|_{(s-c)} = \mathcal{L}[e^{ct} f(t)]$. Therefore,

$$\mathcal{L}[y] = \mathcal{L}[e^t \cos(t)] + 2 \mathcal{L}[e^t \sin(t)] + e^{-2s} \mathcal{L}[e^t \sin(t)].$$

Also recall: $e^{-cs} \mathcal{L}[f(t)] = \mathcal{L}[u_c(t) f(t - c)]$.

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall:

$$\mathcal{L}[y] = \mathcal{L}[\cos(t)]|_{(s-1)} + 2 \mathcal{L}[\sin(t)]|_{(s-1)} + e^{-2s} \mathcal{L}[\sin(t)]|_{(s-1)}$$

and $\mathcal{L}[f(t)]|_{(s-c)} = \mathcal{L}[e^{ct} f(t)]$. Therefore,

$$\mathcal{L}[y] = \mathcal{L}[e^t \cos(t)] + 2 \mathcal{L}[e^t \sin(t)] + e^{-2s} \mathcal{L}[e^t \sin(t)].$$

Also recall: $e^{-cs} \mathcal{L}[f(t)] = \mathcal{L}[u_c(t) f(t - c)]$. Therefore,

$$\mathcal{L}[y] = \mathcal{L}[e^t \cos(t)] + 2 \mathcal{L}[e^t \sin(t)] + \mathcal{L}[u_2(t) e^{(t-2)} \sin(t - 2)].$$

Exam: November 11, 2008. Problem 2

Example

Use Laplace Transform to find y solution of

$$y'' - 2y' + 2y = \delta(t - 2), \quad y(0) = 1, \quad y'(0) = 3.$$

Solution: Recall:

$$\mathcal{L}[y] = \mathcal{L}[\cos(t)]|_{(s-1)} + 2 \mathcal{L}[\sin(t)]|_{(s-1)} + e^{-2s} \mathcal{L}[\sin(t)]|_{(s-1)}$$

and $\mathcal{L}[f(t)]|_{(s-c)} = \mathcal{L}[e^{ct} f(t)]$. Therefore,

$$\mathcal{L}[y] = \mathcal{L}[e^t \cos(t)] + 2 \mathcal{L}[e^t \sin(t)] + e^{-2s} \mathcal{L}[e^t \sin(t)].$$

Also recall: $e^{-cs} \mathcal{L}[f(t)] = \mathcal{L}[u_c(t) f(t - c)]$. Therefore,

$$\mathcal{L}[y] = \mathcal{L}[e^t \cos(t)] + 2 \mathcal{L}[e^t \sin(t)] + \mathcal{L}[u_2(t) e^{(t-2)} \sin(t - 2)].$$

$$y(t) = [\cos(t) + 2 \sin(t)] e^t + u_2(t) \sin(t - 2) e^{(t-2)}. \quad \triangleleft$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$


Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution:

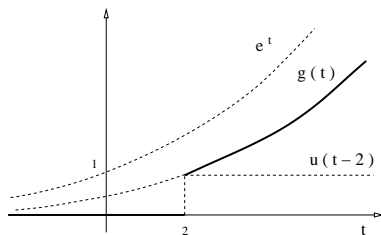

Exam: November 11, 2008. Problem 3


Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution:

Express g using step functions,

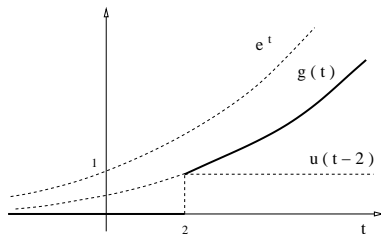


Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution:

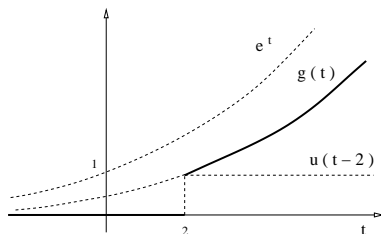

Express g using step functions,

$$g(t) = u_2(t) e^{(t-2)}.$$


Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution:

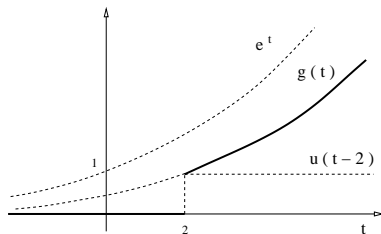

Express g using step functions,

$$g(t) = u_2(t) e^{(t-2)}.$$

$$\mathcal{L}[u_c(t) f(t - c)] = e^{-cs} \mathcal{L}[f(t)].$$


Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution:

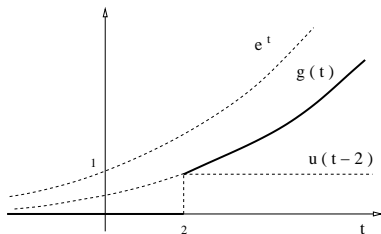

Express g using step functions,

$$g(t) = u_2(t) e^{(t-2)}.$$

$$\mathcal{L}[u_c(t) f(t - c)] = e^{-cs} \mathcal{L}[f(t)].$$

Therefore,

$$\mathcal{L}[g(t)] = e^{-2s} \mathcal{L}[e^t].$$


Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution:

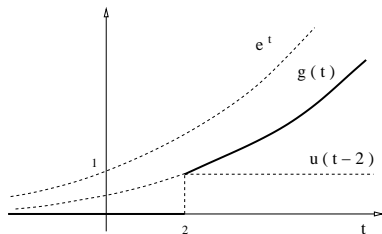

Express g using step functions,

$$g(t) = u_2(t) e^{(t-2)}.$$

$$\mathcal{L}[u_c(t) f(t - c)] = e^{-cs} \mathcal{L}[f(t)].$$

Therefore,

$$\mathcal{L}[g(t)] = e^{-2s} \mathcal{L}[e^t].$$

We obtain:
$$\mathcal{L}[g(t)] = \frac{e^{-2s}}{(s-1)}.$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $\mathcal{L}[g(t)] = \frac{e^{-2s}}{(s-1)}.$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $\mathcal{L}[g(t)] = \frac{e^{-2s}}{(s-1)}$.

$$\mathcal{L}[y''] + 3\mathcal{L}[y] = \mathcal{L}[g(t)]$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $\mathcal{L}[g(t)] = \frac{e^{-2s}}{(s-1)}$.

$$\mathcal{L}[y''] + 3\mathcal{L}[y] = \mathcal{L}[g(t)] = \frac{e^{-2s}}{(s-1)}.$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $\mathcal{L}[g(t)] = \frac{e^{-2s}}{(s-1)}$.

$$\mathcal{L}[y''] + 3\mathcal{L}[y] = \mathcal{L}[g(t)] = \frac{e^{-2s}}{(s-1)}.$$

$$(s^2 + 3)\mathcal{L}[y] = \frac{e^{-2s}}{(s-1)}$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $\mathcal{L}[g(t)] = \frac{e^{-2s}}{(s-1)}$.

$$\mathcal{L}[y''] + 3\mathcal{L}[y] = \mathcal{L}[g(t)] = \frac{e^{-2s}}{(s-1)}.$$

$$(s^2 + 3)\mathcal{L}[y] = \frac{e^{-2s}}{(s-1)} \Rightarrow \mathcal{L}[y] = e^{-2s} \frac{1}{(s-1)(s^2 + 3)}.$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $\mathcal{L}[g(t)] = \frac{e^{-2s}}{(s-1)}$.

$$\mathcal{L}[y''] + 3\mathcal{L}[y] = \mathcal{L}[g(t)] = \frac{e^{-2s}}{(s-1)}.$$

$$(s^2 + 3)\mathcal{L}[y] = \frac{e^{-2s}}{(s-1)} \Rightarrow \mathcal{L}[y] = e^{-2s} \frac{1}{(s-1)(s^2 + 3)}.$$

$$H(s) = \frac{1}{(s-1)(s^2 + 3)}$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $\mathcal{L}[g(t)] = \frac{e^{-2s}}{(s-1)}$.

$$\mathcal{L}[y''] + 3\mathcal{L}[y] = \mathcal{L}[g(t)] = \frac{e^{-2s}}{(s-1)}.$$

$$(s^2 + 3)\mathcal{L}[y] = \frac{e^{-2s}}{(s-1)} \Rightarrow \mathcal{L}[y] = e^{-2s} \frac{1}{(s-1)(s^2+3)}.$$

$$H(s) = \frac{1}{(s-1)(s^2+3)} = \frac{a}{(s-1)} + \frac{(bs+c)}{(s^2+3)}$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $\mathcal{L}[g(t)] = \frac{e^{-2s}}{(s-1)}$.

$$\mathcal{L}[y''] + 3\mathcal{L}[y] = \mathcal{L}[g(t)] = \frac{e^{-2s}}{(s-1)}.$$

$$(s^2 + 3)\mathcal{L}[y] = \frac{e^{-2s}}{(s-1)} \Rightarrow \mathcal{L}[y] = e^{-2s} \frac{1}{(s-1)(s^2+3)}.$$

$$H(s) = \frac{1}{(s-1)(s^2+3)} = \frac{a}{(s-1)} + \frac{(bs+c)}{(s^2+3)}$$

$$1 = a(s^2+3) + (bs+c)(s-1)$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $1 = a(s^2 + 3) + (bs + c)(s - 1)$.

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $1 = a(s^2 + 3) + (bs + c)(s - 1)$.

$$1 = as^2 + 3a + bs^2 + cs - bs - c$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $1 = a(s^2 + 3) + (bs + c)(s - 1)$.

$$1 = as^2 + 3a + bs^2 + cs - bs - c$$

$$1 = (a + b)s^2 + (c - b)s + (3a - c)$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $1 = a(s^2 + 3) + (bs + c)(s - 1)$.

$$1 = as^2 + 3a + bs^2 + cs - bs - c$$

$$1 = (a + b)s^2 + (c - b)s + (3a - c)$$

$$a + b = 0, \quad c - b = 0, \quad 3a - c = 1.$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $1 = a(s^2 + 3) + (bs + c)(s - 1)$.

$$1 = as^2 + 3a + bs^2 + cs - bs - c$$

$$1 = (a + b)s^2 + (c - b)s + (3a - c)$$

$$a + b = 0, \quad c - b = 0, \quad 3a - c = 1.$$

$$a = -b,$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $1 = a(s^2 + 3) + (bs + c)(s - 1)$.

$$1 = as^2 + 3a + bs^2 + cs - bs - c$$

$$1 = (a + b)s^2 + (c - b)s + (3a - c)$$

$$a + b = 0, \quad c - b = 0, \quad 3a - c = 1.$$

$$a = -b, \quad c = b,$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $1 = a(s^2 + 3) + (bs + c)(s - 1)$.

$$1 = as^2 + 3a + bs^2 + cs - bs - c$$

$$1 = (a + b)s^2 + (c - b)s + (3a - c)$$

$$a + b = 0, \quad c - b = 0, \quad 3a - c = 1.$$

$$a = -b, \quad c = b, \quad -3b - b = 1$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $1 = a(s^2 + 3) + (bs + c)(s - 1)$.

$$1 = as^2 + 3a + bs^2 + cs - bs - c$$

$$1 = (a + b)s^2 + (c - b)s + (3a - c)$$

$$a + b = 0, \quad c - b = 0, \quad 3a - c = 1.$$

$$a = -b, \quad c = b, \quad -3b - b = 1 \quad \Rightarrow \quad b = -\frac{1}{4},$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $1 = a(s^2 + 3) + (bs + c)(s - 1)$.

$$1 = as^2 + 3a + bs^2 + cs - bs - c$$

$$1 = (a + b)s^2 + (c - b)s + (3a - c)$$

$$a + b = 0, \quad c - b = 0, \quad 3a - c = 1.$$

$$a = -b, \quad c = b, \quad -3b - b = 1 \quad \Rightarrow \quad b = -\frac{1}{4}, \quad a = \frac{1}{4},$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $1 = a(s^2 + 3) + (bs + c)(s - 1)$.

$$1 = as^2 + 3a + bs^2 + cs - bs - c$$

$$1 = (a + b)s^2 + (c - b)s + (3a - c)$$

$$a + b = 0, \quad c - b = 0, \quad 3a - c = 1.$$

$$a = -b, \quad c = b, \quad -3b - b = 1 \quad \Rightarrow \quad b = -\frac{1}{4}, \quad a = \frac{1}{4}, \quad c = -\frac{1}{4}.$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $1 = a(s^2 + 3) + (bs + c)(s - 1)$.

$$1 = as^2 + 3a + bs^2 + cs - bs - c$$

$$1 = (a + b)s^2 + (c - b)s + (3a - c)$$

$$a + b = 0, \quad c - b = 0, \quad 3a - c = 1.$$

$$a = -b, \quad c = b, \quad -3b - b = 1 \quad \Rightarrow \quad b = -\frac{1}{4}, \quad a = \frac{1}{4}, \quad c = -\frac{1}{4}.$$

$$H(s) = \frac{1}{4} \left[\frac{1}{s-1} - \frac{s+1}{s^2+3} \right].$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $H(s) = \frac{1}{4} \left[\frac{1}{s-1} - \frac{s+1}{s^2+3} \right]$, $\mathcal{L}[y] = e^{-2s} H(s)$.

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $H(s) = \frac{1}{4} \left[\frac{1}{s-1} - \frac{s+1}{s^2+3} \right]$, $\mathcal{L}[y] = e^{-2s} H(s)$.

$$H(s) = \frac{1}{4} \left[\frac{1}{s-1} - \frac{s}{s^2+3} - \frac{1}{\sqrt{3}} \frac{\sqrt{3}}{s^2+3} \right],$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $H(s) = \frac{1}{4} \left[\frac{1}{s-1} - \frac{s+1}{s^2+3} \right]$, $\mathcal{L}[y] = e^{-2s} H(s)$.

$$H(s) = \frac{1}{4} \left[\frac{1}{s-1} - \frac{s}{s^2+3} - \frac{1}{\sqrt{3}} \frac{\sqrt{3}}{s^2+3} \right],$$

$$H(s) = \frac{1}{4} \left[\mathcal{L}[e^t] \right]$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $H(s) = \frac{1}{4} \left[\frac{1}{s-1} - \frac{s+1}{s^2+3} \right]$, $\mathcal{L}[y] = e^{-2s} H(s)$.

$$H(s) = \frac{1}{4} \left[\frac{1}{s-1} - \frac{s}{s^2+3} - \frac{1}{\sqrt{3}} \frac{\sqrt{3}}{s^2+3} \right],$$

$$H(s) = \frac{1}{4} \left[\mathcal{L}[e^t] - \mathcal{L}[\cos(\sqrt{3} t)] \right]$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $H(s) = \frac{1}{4} \left[\frac{1}{s-1} - \frac{s+1}{s^2+3} \right]$, $\mathcal{L}[y] = e^{-2s} H(s)$.

$$H(s) = \frac{1}{4} \left[\frac{1}{s-1} - \frac{s}{s^2+3} - \frac{1}{\sqrt{3}} \frac{\sqrt{3}}{s^2+3} \right],$$

$$H(s) = \frac{1}{4} \left[\mathcal{L}[e^t] - \mathcal{L}[\cos(\sqrt{3} t)] - \frac{1}{\sqrt{3}} \mathcal{L}[\sin(\sqrt{3} t)] \right].$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $H(s) = \frac{1}{4} \left[\frac{1}{s-1} - \frac{s+1}{s^2+3} \right]$, $\mathcal{L}[y] = e^{-2s} H(s)$.

$$H(s) = \frac{1}{4} \left[\frac{1}{s-1} - \frac{s}{s^2+3} - \frac{1}{\sqrt{3}} \frac{\sqrt{3}}{s^2+3} \right],$$

$$H(s) = \frac{1}{4} \left[\mathcal{L}[e^t] - \mathcal{L}[\cos(\sqrt{3}t)] - \frac{1}{\sqrt{3}} \mathcal{L}[\sin(\sqrt{3}t)] \right].$$

$$H(s) = \mathcal{L} \left[\frac{1}{4} \left(e^t - \cos(\sqrt{3}t) - \frac{1}{\sqrt{3}} \sin(\sqrt{3}t) \right) \right].$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $H(s) = \mathcal{L}\left[\frac{1}{4}\left(e^t - \cos(\sqrt{3}t) - \frac{1}{\sqrt{3}}\sin(\sqrt{3}t)\right)\right].$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $H(s) = \mathcal{L}\left[\frac{1}{4}\left(e^t - \cos(\sqrt{3}t) - \frac{1}{\sqrt{3}}\sin(\sqrt{3}t)\right)\right]$.

$$h(t) = \frac{1}{4}\left(e^t - \cos(\sqrt{3}t) - \frac{1}{\sqrt{3}}\sin(\sqrt{3}t)\right),$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $H(s) = \mathcal{L}\left[\frac{1}{4}\left(e^t - \cos(\sqrt{3}t) - \frac{1}{\sqrt{3}}\sin(\sqrt{3}t)\right)\right]$.

$$h(t) = \frac{1}{4}\left(e^t - \cos(\sqrt{3}t) - \frac{1}{\sqrt{3}}\sin(\sqrt{3}t)\right), \quad H(s) = \mathcal{L}[h(t)].$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $H(s) = \mathcal{L}\left[\frac{1}{4}\left(e^t - \cos(\sqrt{3}t) - \frac{1}{\sqrt{3}}\sin(\sqrt{3}t)\right)\right]$.

$$h(t) = \frac{1}{4}\left(e^t - \cos(\sqrt{3}t) - \frac{1}{\sqrt{3}}\sin(\sqrt{3}t)\right), \quad H(s) = \mathcal{L}[h(t)].$$

$$\mathcal{L}[y] = e^{-2s} H(s)$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $H(s) = \mathcal{L}\left[\frac{1}{4}\left(e^t - \cos(\sqrt{3}t) - \frac{1}{\sqrt{3}}\sin(\sqrt{3}t)\right)\right]$.

$$h(t) = \frac{1}{4}\left(e^t - \cos(\sqrt{3}t) - \frac{1}{\sqrt{3}}\sin(\sqrt{3}t)\right), \quad H(s) = \mathcal{L}[h(t)].$$

$$\mathcal{L}[y] = e^{-2s} H(s) = e^{-2s} \mathcal{L}[h(t)]$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $H(s) = \mathcal{L}\left[\frac{1}{4}\left(e^t - \cos(\sqrt{3}t) - \frac{1}{\sqrt{3}}\sin(\sqrt{3}t)\right)\right]$.

$$h(t) = \frac{1}{4}\left(e^t - \cos(\sqrt{3}t) - \frac{1}{\sqrt{3}}\sin(\sqrt{3}t)\right), \quad H(s) = \mathcal{L}[h(t)].$$

$$\mathcal{L}[y] = e^{-2s} H(s) = e^{-2s} \mathcal{L}[h(t)] = \mathcal{L}[u_2(t) h(t-2)].$$

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $H(s) = \mathcal{L}\left[\frac{1}{4}\left(e^t - \cos(\sqrt{3}t) - \frac{1}{\sqrt{3}}\sin(\sqrt{3}t)\right)\right]$.

$$h(t) = \frac{1}{4}\left(e^t - \cos(\sqrt{3}t) - \frac{1}{\sqrt{3}}\sin(\sqrt{3}t)\right), \quad H(s) = \mathcal{L}[h(t)].$$

$$\mathcal{L}[y] = e^{-2s} H(s) = e^{-2s} \mathcal{L}[h(t)] = \mathcal{L}[u_2(t) h(t-2)].$$

We conclude: $y(t) = u_2(t) h(t-2)$.

Exam: November 11, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' + 3y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < 2, \\ e^{(t-2)}, & t \geq 2. \end{cases}$$

Solution: Recall: $H(s) = \mathcal{L}\left[\frac{1}{4}\left(e^t - \cos(\sqrt{3}t) - \frac{1}{\sqrt{3}}\sin(\sqrt{3}t)\right)\right]$.

$$h(t) = \frac{1}{4}\left(e^t - \cos(\sqrt{3}t) - \frac{1}{\sqrt{3}}\sin(\sqrt{3}t)\right), \quad H(s) = \mathcal{L}[h(t)].$$

$$\mathcal{L}[y] = e^{-2s} H(s) = e^{-2s} \mathcal{L}[h(t)] = \mathcal{L}[u_2(t) h(t-2)].$$

We conclude: $y(t) = u_2(t) h(t-2)$. Equivalently,

$$y(t) = \frac{u_2(t)}{4} \left[e^{(t-2)} - \cos(\sqrt{3}(t-2)) - \frac{1}{\sqrt{3}} \sin(\sqrt{3}(t-2)) \right]. \triangleleft$$

Extra problem

Example

Use convolutions to find f satisfying $\mathcal{L}[f(t)] = \frac{e^{-2s}}{(s-1)(s^2+3)}$.

Extra problem

Example

Use convolutions to find f satisfying $\mathcal{L}[f(t)] = \frac{e^{-2s}}{(s-1)(s^2+3)}$.

Solution: One way to solve this is with the splitting

$$\mathcal{L}[f(t)] = e^{-2s} \frac{1}{(s^2+3)} \frac{1}{(s-1)}$$

Extra problem

Example

Use convolutions to find f satisfying $\mathcal{L}[f(t)] = \frac{e^{-2s}}{(s-1)(s^2+3)}$.

Solution: One way to solve this is with the splitting

$$\mathcal{L}[f(t)] = e^{-2s} \frac{1}{(s^2+3)} \frac{1}{(s-1)} = e^{-2s} \frac{1}{\sqrt{3}} \frac{\sqrt{3}}{(s^2+3)} \frac{1}{(s-1)},$$

Extra problem

Example

Use convolutions to find f satisfying $\mathcal{L}[f(t)] = \frac{e^{-2s}}{(s-1)(s^2+3)}$.

Solution: One way to solve this is with the splitting

$$\mathcal{L}[f(t)] = e^{-2s} \frac{1}{(s^2+3)} \frac{1}{(s-1)} = e^{-2s} \frac{1}{\sqrt{3}} \frac{\sqrt{3}}{(s^2+3)} \frac{1}{(s-1)},$$

$$\mathcal{L}[f(t)] = e^{-2s} \frac{1}{\sqrt{3}} \mathcal{L}[\sin(\sqrt{3}t)] \mathcal{L}[e^t]$$

Extra problem

Example

Use convolutions to find f satisfying $\mathcal{L}[f(t)] = \frac{e^{-2s}}{(s-1)(s^2+3)}$.

Solution: One way to solve this is with the splitting

$$\mathcal{L}[f(t)] = e^{-2s} \frac{1}{(s^2+3)} \frac{1}{(s-1)} = e^{-2s} \frac{1}{\sqrt{3}} \frac{\sqrt{3}}{(s^2+3)} \frac{1}{(s-1)},$$

$$\mathcal{L}[f(t)] = e^{-2s} \frac{1}{\sqrt{3}} \mathcal{L}[\sin(\sqrt{3}t)] \mathcal{L}[e^t]$$

$$\mathcal{L}[f(t)] = \frac{1}{\sqrt{3}} \mathcal{L}[u_2(t) \sin(\sqrt{3}(t-2))] \mathcal{L}[e^t].$$

Extra problem

Example

Use convolutions to find f satisfying $\mathcal{L}[f(t)] = \frac{e^{-2s}}{(s-1)(s^2+3)}$.

Solution: One way to solve this is with the splitting

$$\mathcal{L}[f(t)] = e^{-2s} \frac{1}{(s^2+3)} \frac{1}{(s-1)} = e^{-2s} \frac{1}{\sqrt{3}} \frac{\sqrt{3}}{(s^2+3)} \frac{1}{(s-1)},$$

$$\mathcal{L}[f(t)] = e^{-2s} \frac{1}{\sqrt{3}} \mathcal{L}[\sin(\sqrt{3}t)] \mathcal{L}[e^t]$$

$$\mathcal{L}[f(t)] = \frac{1}{\sqrt{3}} \mathcal{L}[u_2(t) \sin(\sqrt{3}(t-2))] \mathcal{L}[e^t].$$

$$f(t) = \frac{1}{\sqrt{3}} \int_0^t u_2(\tau) \sin(\sqrt{3}(\tau-2)) e^{(t-\tau)} d\tau. \quad \triangleleft$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$


Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution:

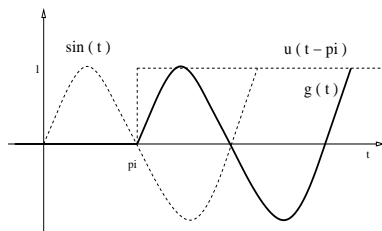


Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution:

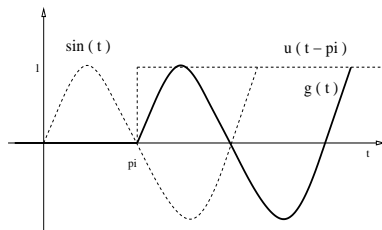

Express g using step functions,


Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution:

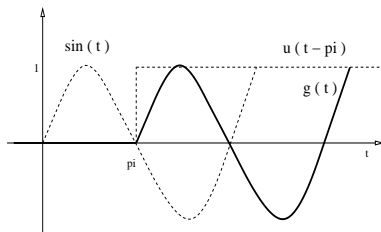

Express g using step functions,

$$g(t) = u_{\pi}(t) \sin(t - \pi).$$


Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution:

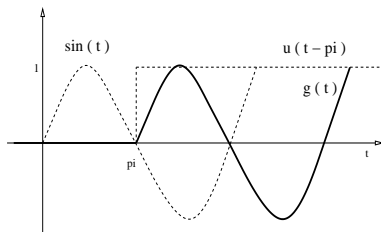

Express g using step functions,

$$g(t) = u_{\pi}(t) \sin(t - \pi).$$

$$\mathcal{L}[u_c(t) f(t - c)] = e^{-cs} \mathcal{L}[f(t)].$$


Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution:

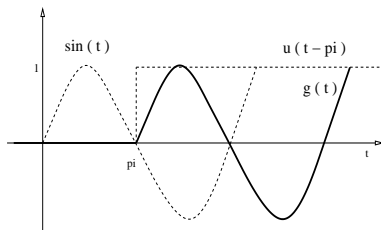

Express g using step functions,

$$g(t) = u_{\pi}(t) \sin(t - \pi).$$

$$\mathcal{L}[u_c(t) f(t - c)] = e^{-cs} \mathcal{L}[f(t)].$$

Therefore,

$$\mathcal{L}[g(t)] = e^{-\pi s} \mathcal{L}[\sin(t)].$$


Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution:

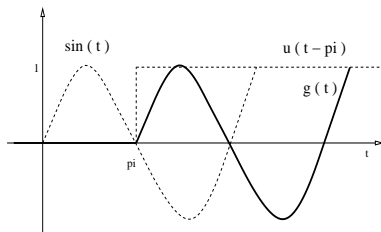

Express g using step functions,

$$g(t) = u_{\pi}(t) \sin(t - \pi).$$

$$\mathcal{L}[u_c(t) f(t - c)] = e^{-cs} \mathcal{L}[f(t)].$$

Therefore,

$$\mathcal{L}[g(t)] = e^{-\pi s} \mathcal{L}[\sin(t)].$$

We obtain:
$$\mathcal{L}[g(t)] = \frac{e^{-\pi s}}{s^2 + 1}.$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

$$\text{Solution: } \mathcal{L}[g(t)] = \frac{e^{-\pi s}}{s^2 + 1}.$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

$$\text{Solution: } \mathcal{L}[g(t)] = \frac{e^{-\pi s}}{s^2 + 1}.$$

$$\mathcal{L}[y''] - 6 \mathcal{L}[y] = \mathcal{L}[g(t)]$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution: $\mathcal{L}[g(t)] = \frac{e^{-\pi s}}{s^2 + 1}.$

$$\mathcal{L}[y''] - 6\mathcal{L}[y] = \mathcal{L}[g(t)] = \frac{e^{-\pi s}}{s^2 + 1}.$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution: $\mathcal{L}[g(t)] = \frac{e^{-\pi s}}{s^2 + 1}.$

$$\mathcal{L}[y''] - 6\mathcal{L}[y] = \mathcal{L}[g(t)] = \frac{e^{-\pi s}}{s^2 + 1}.$$

$$(s^2 - 6)\mathcal{L}[y] = \frac{e^{-\pi s}}{s^2 + 1}$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution: $\mathcal{L}[g(t)] = \frac{e^{-\pi s}}{s^2 + 1}.$

$$\mathcal{L}[y''] - 6\mathcal{L}[y] = \mathcal{L}[g(t)] = \frac{e^{-\pi s}}{s^2 + 1}.$$

$$(s^2 - 6)\mathcal{L}[y] = \frac{e^{-\pi s}}{s^2 + 1} \Rightarrow \mathcal{L}[y] = e^{-\pi s} \frac{1}{(s^2 + 1)(s^2 - 6)}.$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution: $\mathcal{L}[g(t)] = \frac{e^{-\pi s}}{s^2 + 1}.$

$$\mathcal{L}[y''] - 6\mathcal{L}[y] = \mathcal{L}[g(t)] = \frac{e^{-\pi s}}{s^2 + 1}.$$

$$(s^2 - 6)\mathcal{L}[y] = \frac{e^{-\pi s}}{s^2 + 1} \Rightarrow \mathcal{L}[y] = e^{-\pi s} \frac{1}{(s^2 + 1)(s^2 - 6)}.$$

$$H(s) = \frac{1}{(s^2 + 1)(s^2 - 6)}$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution: $\mathcal{L}[g(t)] = \frac{e^{-\pi s}}{s^2 + 1}.$

$$\mathcal{L}[y''] - 6\mathcal{L}[y] = \mathcal{L}[g(t)] = \frac{e^{-\pi s}}{s^2 + 1}.$$

$$(s^2 - 6)\mathcal{L}[y] = \frac{e^{-\pi s}}{s^2 + 1} \Rightarrow \mathcal{L}[y] = e^{-\pi s} \frac{1}{(s^2 + 1)(s^2 - 6)}.$$

$$H(s) = \frac{1}{(s^2 + 1)(s^2 - 6)} = \frac{1}{(s^2 + 1)(s + \sqrt{6})(s - \sqrt{6})}$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution: $\mathcal{L}[g(t)] = \frac{e^{-\pi s}}{s^2 + 1}.$

$$\mathcal{L}[y''] - 6\mathcal{L}[y] = \mathcal{L}[g(t)] = \frac{e^{-\pi s}}{s^2 + 1}.$$

$$(s^2 - 6)\mathcal{L}[y] = \frac{e^{-\pi s}}{s^2 + 1} \Rightarrow \mathcal{L}[y] = e^{-\pi s} \frac{1}{(s^2 + 1)(s^2 - 6)}.$$

$$H(s) = \frac{1}{(s^2 + 1)(s^2 - 6)} = \frac{1}{(s^2 + 1)(s + \sqrt{6})(s - \sqrt{6})}$$

$$H(s) = \frac{a}{(s + \sqrt{6})} + \frac{b}{(s - \sqrt{6})} + \frac{(cs + d)}{(s^2 + 1)}.$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

$$\text{Solution: } H(s) = \frac{a}{(s + \sqrt{6})} + \frac{b}{(s - \sqrt{6})} + \frac{(cs + d)}{(s^2 + 1)}.$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution: $H(s) = \frac{a}{(s + \sqrt{6})} + \frac{b}{(s - \sqrt{6})} + \frac{(cs + d)}{(s^2 + 1)}.$

$$\frac{1}{(s^2 + 1)(s + \sqrt{6})(s - \sqrt{6})} = \frac{a}{(s + \sqrt{6})} + \frac{b}{(s - \sqrt{6})} + \frac{(cs + d)}{(s^2 + 1)}$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution: $H(s) = \frac{a}{(s + \sqrt{6})} + \frac{b}{(s - \sqrt{6})} + \frac{(cs + d)}{(s^2 + 1)}.$

$$\frac{1}{(s^2 + 1)(s + \sqrt{6})(s - \sqrt{6})} = \frac{a}{(s + \sqrt{6})} + \frac{b}{(s - \sqrt{6})} + \frac{(cs + d)}{(s^2 + 1)}$$

$$1 = a(s - \sqrt{6})(s^2 + 1) + b(s + \sqrt{6})(s^2 + 1) + (cs + d)(s^2 - 6).$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution: $H(s) = \frac{a}{(s + \sqrt{6})} + \frac{b}{(s - \sqrt{6})} + \frac{(cs + d)}{(s^2 + 1)}.$

$$\frac{1}{(s^2 + 1)(s + \sqrt{6})(s - \sqrt{6})} = \frac{a}{(s + \sqrt{6})} + \frac{b}{(s - \sqrt{6})} + \frac{(cs + d)}{(s^2 + 1)}$$

$$1 = a(s - \sqrt{6})(s^2 + 1) + b(s + \sqrt{6})(s^2 + 1) + (cs + d)(s^2 - 6).$$

The solution is: $a = -\frac{1}{14\sqrt{6}}, \quad b = \frac{1}{14\sqrt{6}}, \quad c = 0, \quad d = -\frac{1}{7}.$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

$$\text{Solution: } H(s) = \frac{1}{14\sqrt{6}} \left[-\frac{1}{(s + \sqrt{6})} + \frac{1}{(s - \sqrt{6})} - \frac{2\sqrt{6}}{(s^2 + 1)} \right].$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

$$\text{Solution: } H(s) = \frac{1}{14\sqrt{6}} \left[-\frac{1}{(s + \sqrt{6})} + \frac{1}{(s - \sqrt{6})} - \frac{2\sqrt{6}}{(s^2 + 1)} \right].$$

$$H(s) = \frac{1}{14\sqrt{6}} \left[-\mathcal{L}[e^{-\sqrt{6}t}] + \mathcal{L}[e^{\sqrt{6}t}] - 2\sqrt{6} \mathcal{L}[\sin(t)] \right]$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

$$\text{Solution: } H(s) = \frac{1}{14\sqrt{6}} \left[-\frac{1}{(s + \sqrt{6})} + \frac{1}{(s - \sqrt{6})} - \frac{2\sqrt{6}}{(s^2 + 1)} \right].$$

$$H(s) = \frac{1}{14\sqrt{6}} \left[-\mathcal{L}[e^{-\sqrt{6}t}] + \mathcal{L}[e^{\sqrt{6}t}] - 2\sqrt{6} \mathcal{L}[\sin(t)] \right]$$

$$H(s) = \mathcal{L} \left[\frac{1}{14\sqrt{6}} \left(-e^{-\sqrt{6}t} + e^{\sqrt{6}t} - 2\sqrt{6} \sin(t) \right) \right].$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

$$\text{Solution: } H(s) = \frac{1}{14\sqrt{6}} \left[-\frac{1}{(s + \sqrt{6})} + \frac{1}{(s - \sqrt{6})} - \frac{2\sqrt{6}}{(s^2 + 1)} \right].$$

$$H(s) = \frac{1}{14\sqrt{6}} \left[-\mathcal{L}[e^{-\sqrt{6}t}] + \mathcal{L}[e^{\sqrt{6}t}] - 2\sqrt{6} \mathcal{L}[\sin(t)] \right]$$

$$H(s) = \mathcal{L} \left[\frac{1}{14\sqrt{6}} \left(-e^{-\sqrt{6}t} + e^{\sqrt{6}t} - 2\sqrt{6} \sin(t) \right) \right].$$

$$h(t) = \frac{1}{14\sqrt{6}} \left[-e^{-\sqrt{6}t} + e^{\sqrt{6}t} - 2\sqrt{6} \sin(t) \right]$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

$$\text{Solution: } H(s) = \frac{1}{14\sqrt{6}} \left[-\frac{1}{(s + \sqrt{6})} + \frac{1}{(s - \sqrt{6})} - \frac{2\sqrt{6}}{(s^2 + 1)} \right].$$

$$H(s) = \frac{1}{14\sqrt{6}} \left[-\mathcal{L}[e^{-\sqrt{6}t}] + \mathcal{L}[e^{\sqrt{6}t}] - 2\sqrt{6} \mathcal{L}[\sin(t)] \right]$$

$$H(s) = \mathcal{L} \left[\frac{1}{14\sqrt{6}} \left(-e^{-\sqrt{6}t} + e^{\sqrt{6}t} - 2\sqrt{6} \sin(t) \right) \right].$$

$$h(t) = \frac{1}{14\sqrt{6}} \left[-e^{-\sqrt{6}t} + e^{\sqrt{6}t} - 2\sqrt{6} \sin(t) \right] \Rightarrow H(s) = \mathcal{L}[h(t)].$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution: Recall: $\mathcal{L}[y] = e^{-\pi s} H(s)$, where $H(s) = \mathcal{L}[h(t)]$, and

$$h(t) = \frac{1}{14\sqrt{6}} \left[-e^{-\sqrt{6}t} + e^{\sqrt{6}t} - 2\sqrt{6} \sin(t) \right].$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution: Recall: $\mathcal{L}[y] = e^{-\pi s} H(s)$, where $H(s) = \mathcal{L}[h(t)]$, and

$$h(t) = \frac{1}{14\sqrt{6}} \left[-e^{-\sqrt{6}t} + e^{\sqrt{6}t} - 2\sqrt{6} \sin(t) \right].$$

$$\mathcal{L}[y] = e^{-\pi s} \mathcal{L}[h(t)]$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution: Recall: $\mathcal{L}[y] = e^{-\pi s} H(s)$, where $H(s) = \mathcal{L}[h(t)]$, and

$$h(t) = \frac{1}{14\sqrt{6}} \left[-e^{-\sqrt{6}t} + e^{\sqrt{6}t} - 2\sqrt{6} \sin(t) \right].$$

$$\mathcal{L}[y] = e^{-\pi s} \mathcal{L}[h(t)] = \mathcal{L}[u_\pi(t) h(t - \pi)]$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution: Recall: $\mathcal{L}[y] = e^{-\pi s} H(s)$, where $H(s) = \mathcal{L}[h(t)]$, and

$$h(t) = \frac{1}{14\sqrt{6}} \left[-e^{-\sqrt{6}t} + e^{\sqrt{6}t} - 2\sqrt{6} \sin(t) \right].$$

$$\mathcal{L}[y] = e^{-\pi s} \mathcal{L}[h(t)] = \mathcal{L}[u_\pi(t) h(t - \pi)] \Rightarrow y(t) = u_\pi(t) h(t - \pi).$$

Exam: November 12, 2008. Problem 3

Example

Sketch the graph of g and use LT to find y solution of

$$y'' - 6y = g(t), \quad y(0) = y'(0) = 0, \quad g(t) = \begin{cases} 0, & t < \pi, \\ \sin(t - \pi), & t \geq \pi. \end{cases}$$

Solution: Recall: $\mathcal{L}[y] = e^{-\pi s} H(s)$, where $H(s) = \mathcal{L}[h(t)]$, and

$$h(t) = \frac{1}{14\sqrt{6}} \left[-e^{-\sqrt{6}t} + e^{\sqrt{6}t} - 2\sqrt{6} \sin(t) \right].$$

$$\mathcal{L}[y] = e^{-\pi s} \mathcal{L}[h(t)] = \mathcal{L}[u_\pi(t) h(t - \pi)] \Rightarrow y(t) = u_\pi(t) h(t - \pi).$$

Equivalently:

$$y(t) = \frac{u_\pi(t)}{14\sqrt{6}} \left[-e^{-\sqrt{6}(t-\pi)} + e^{\sqrt{6}(t-\pi)} - 2\sqrt{6} \sin(t - \pi) \right]. \quad \triangleleft$$